



**STONE
REEF**



CHAIN TOOL SET

Here, we'll show you step by step
how to properly inspect, open, and
reconnect bicycle chains.

Not by luck or guesswork—but with
a systematic approach.

STONE REEF GmbH
Nelkenstr. 15
85591 Vaterstetten
Germany
SR-1315
stone-reef.com/service




CONTENTS

ACCESSORIES

NOTES




USAGE

**LET'S GET
STARTED**

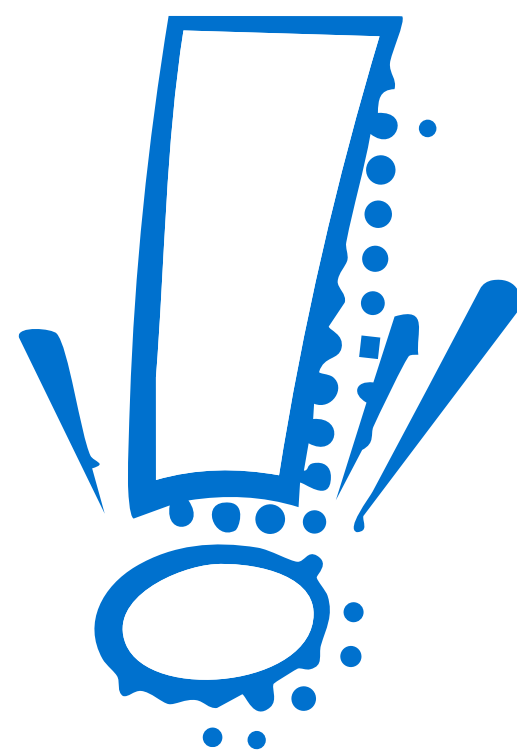

ACCESSORIES


WHAT'S INCLUDED

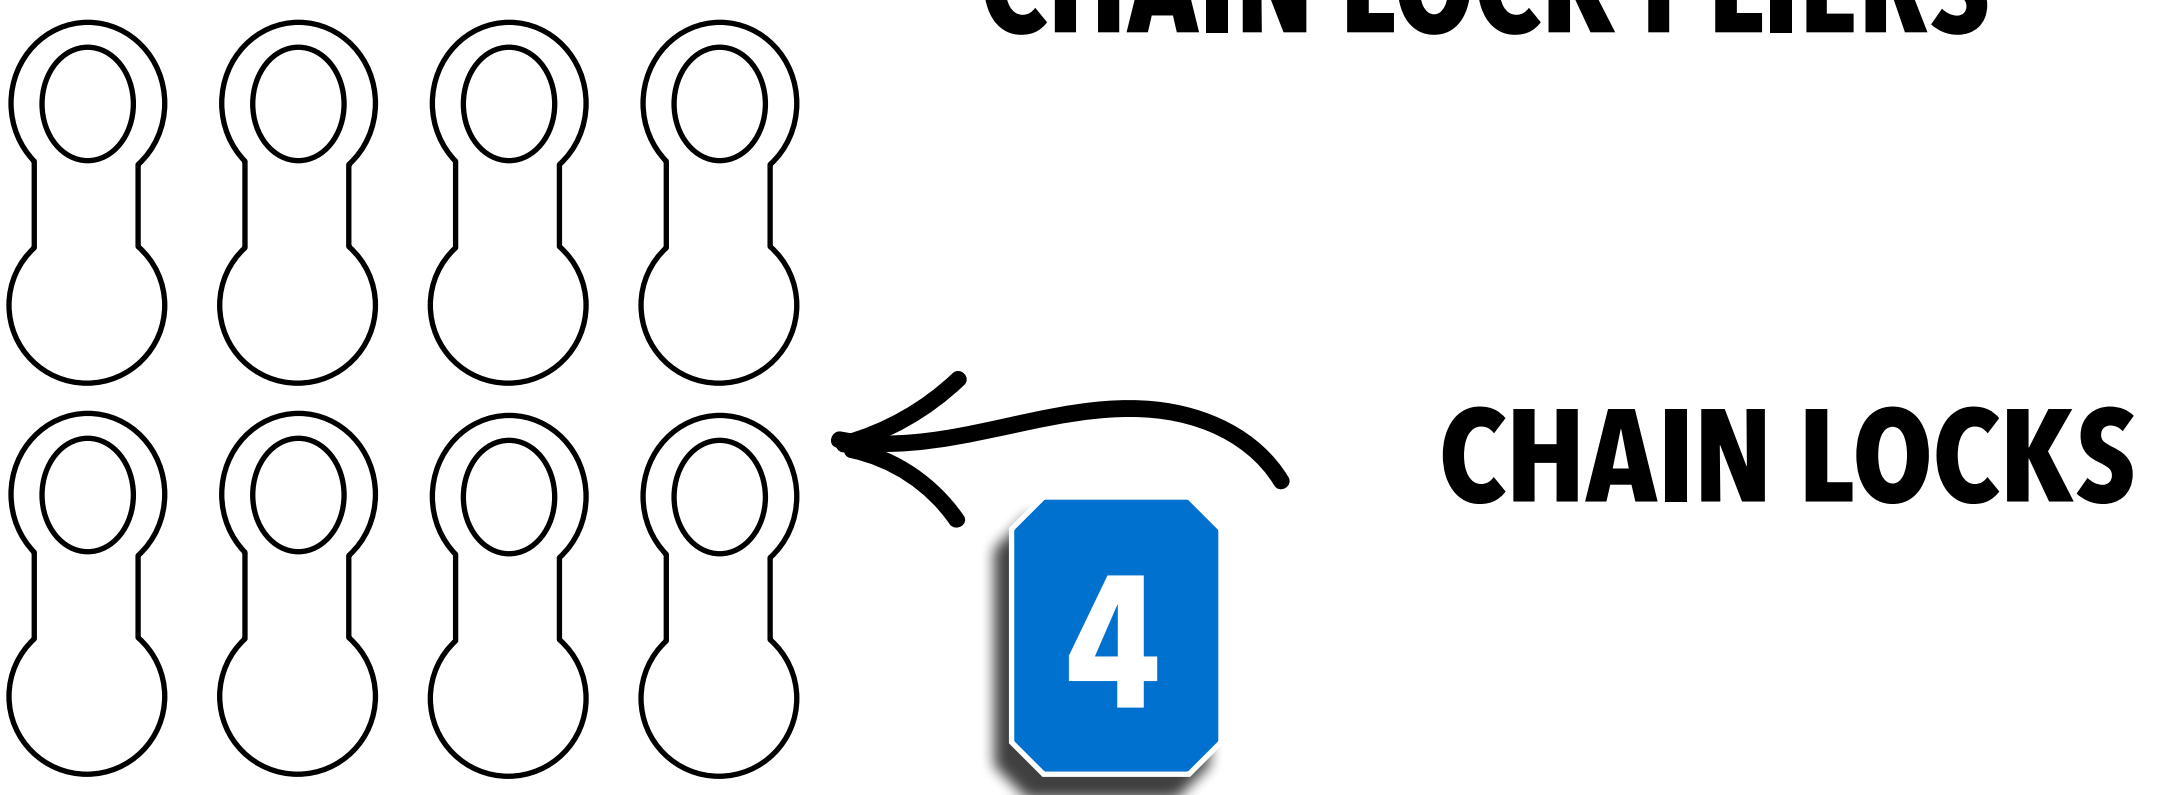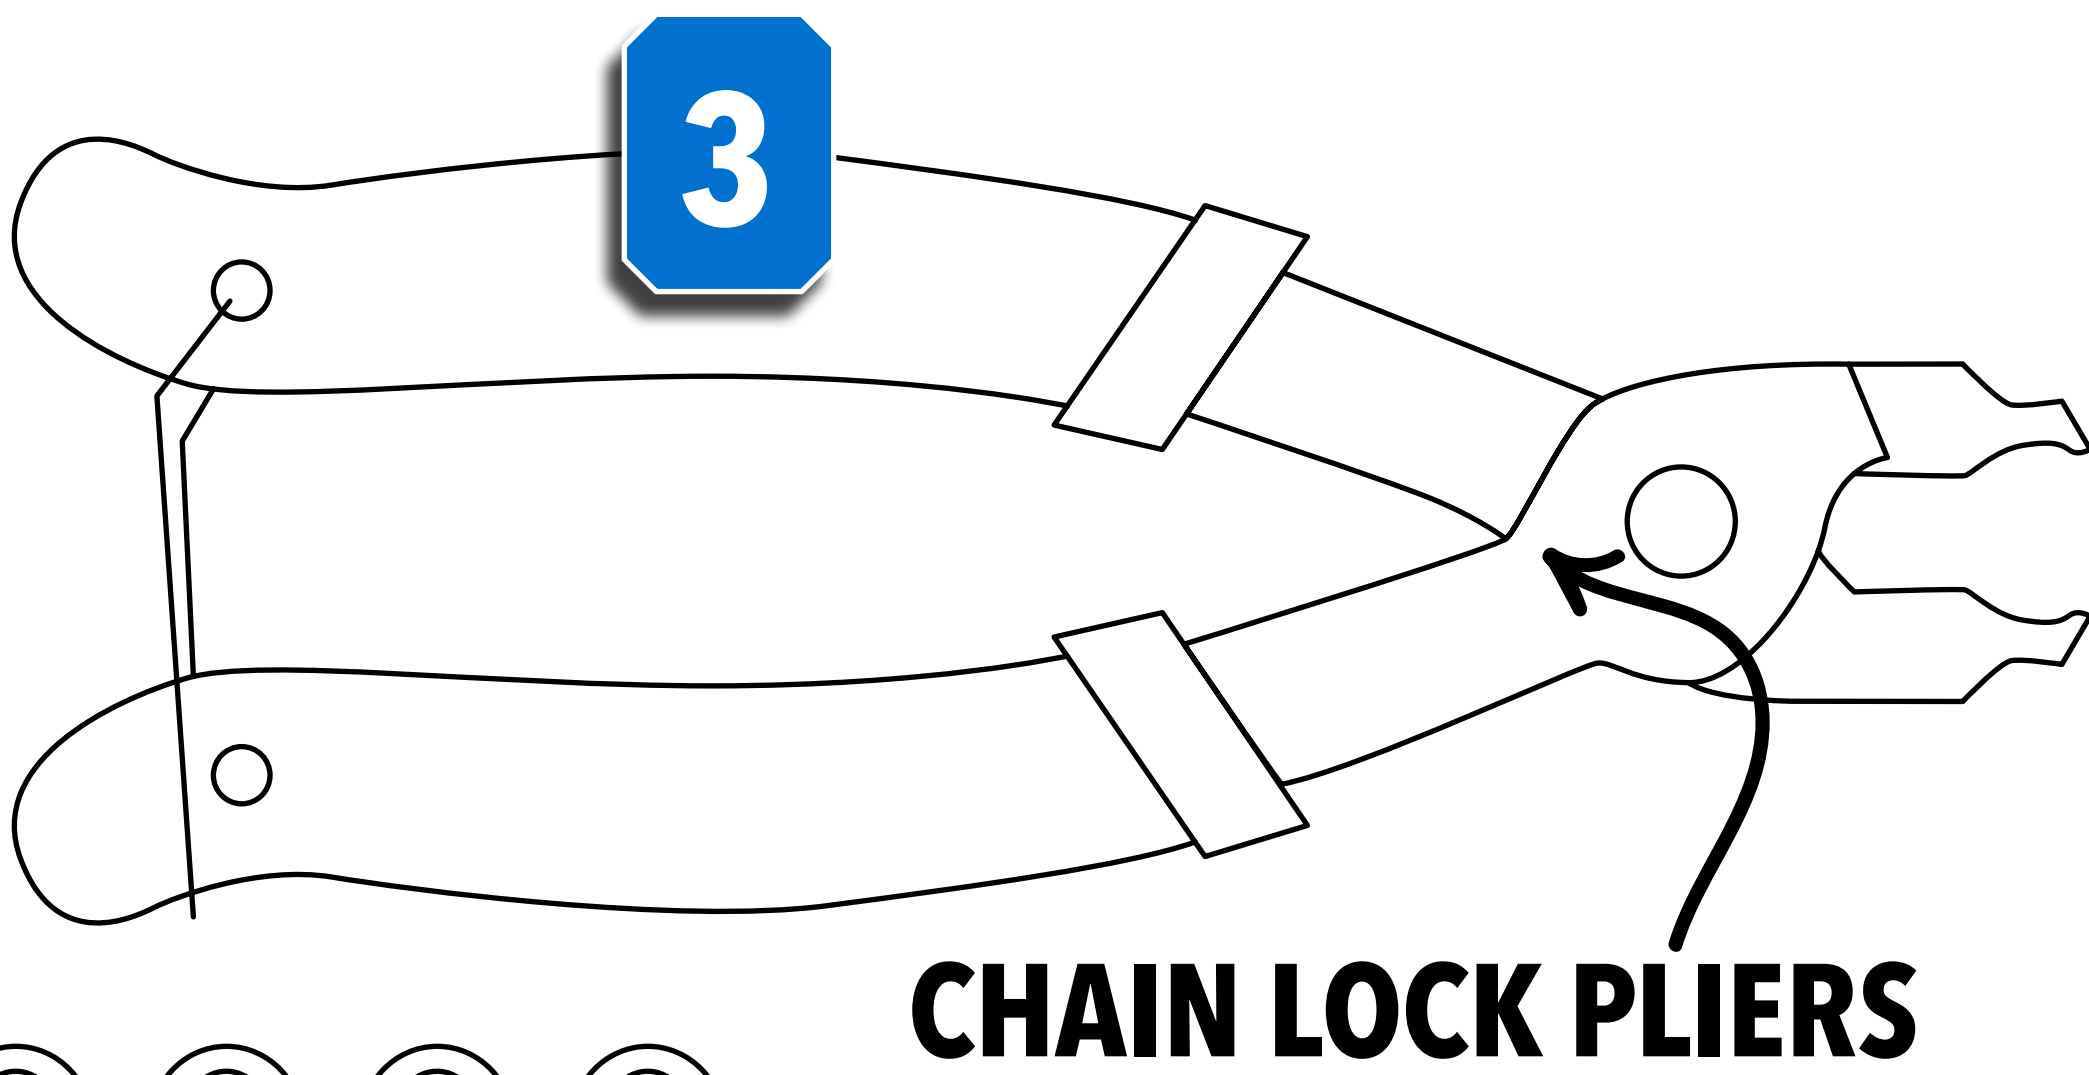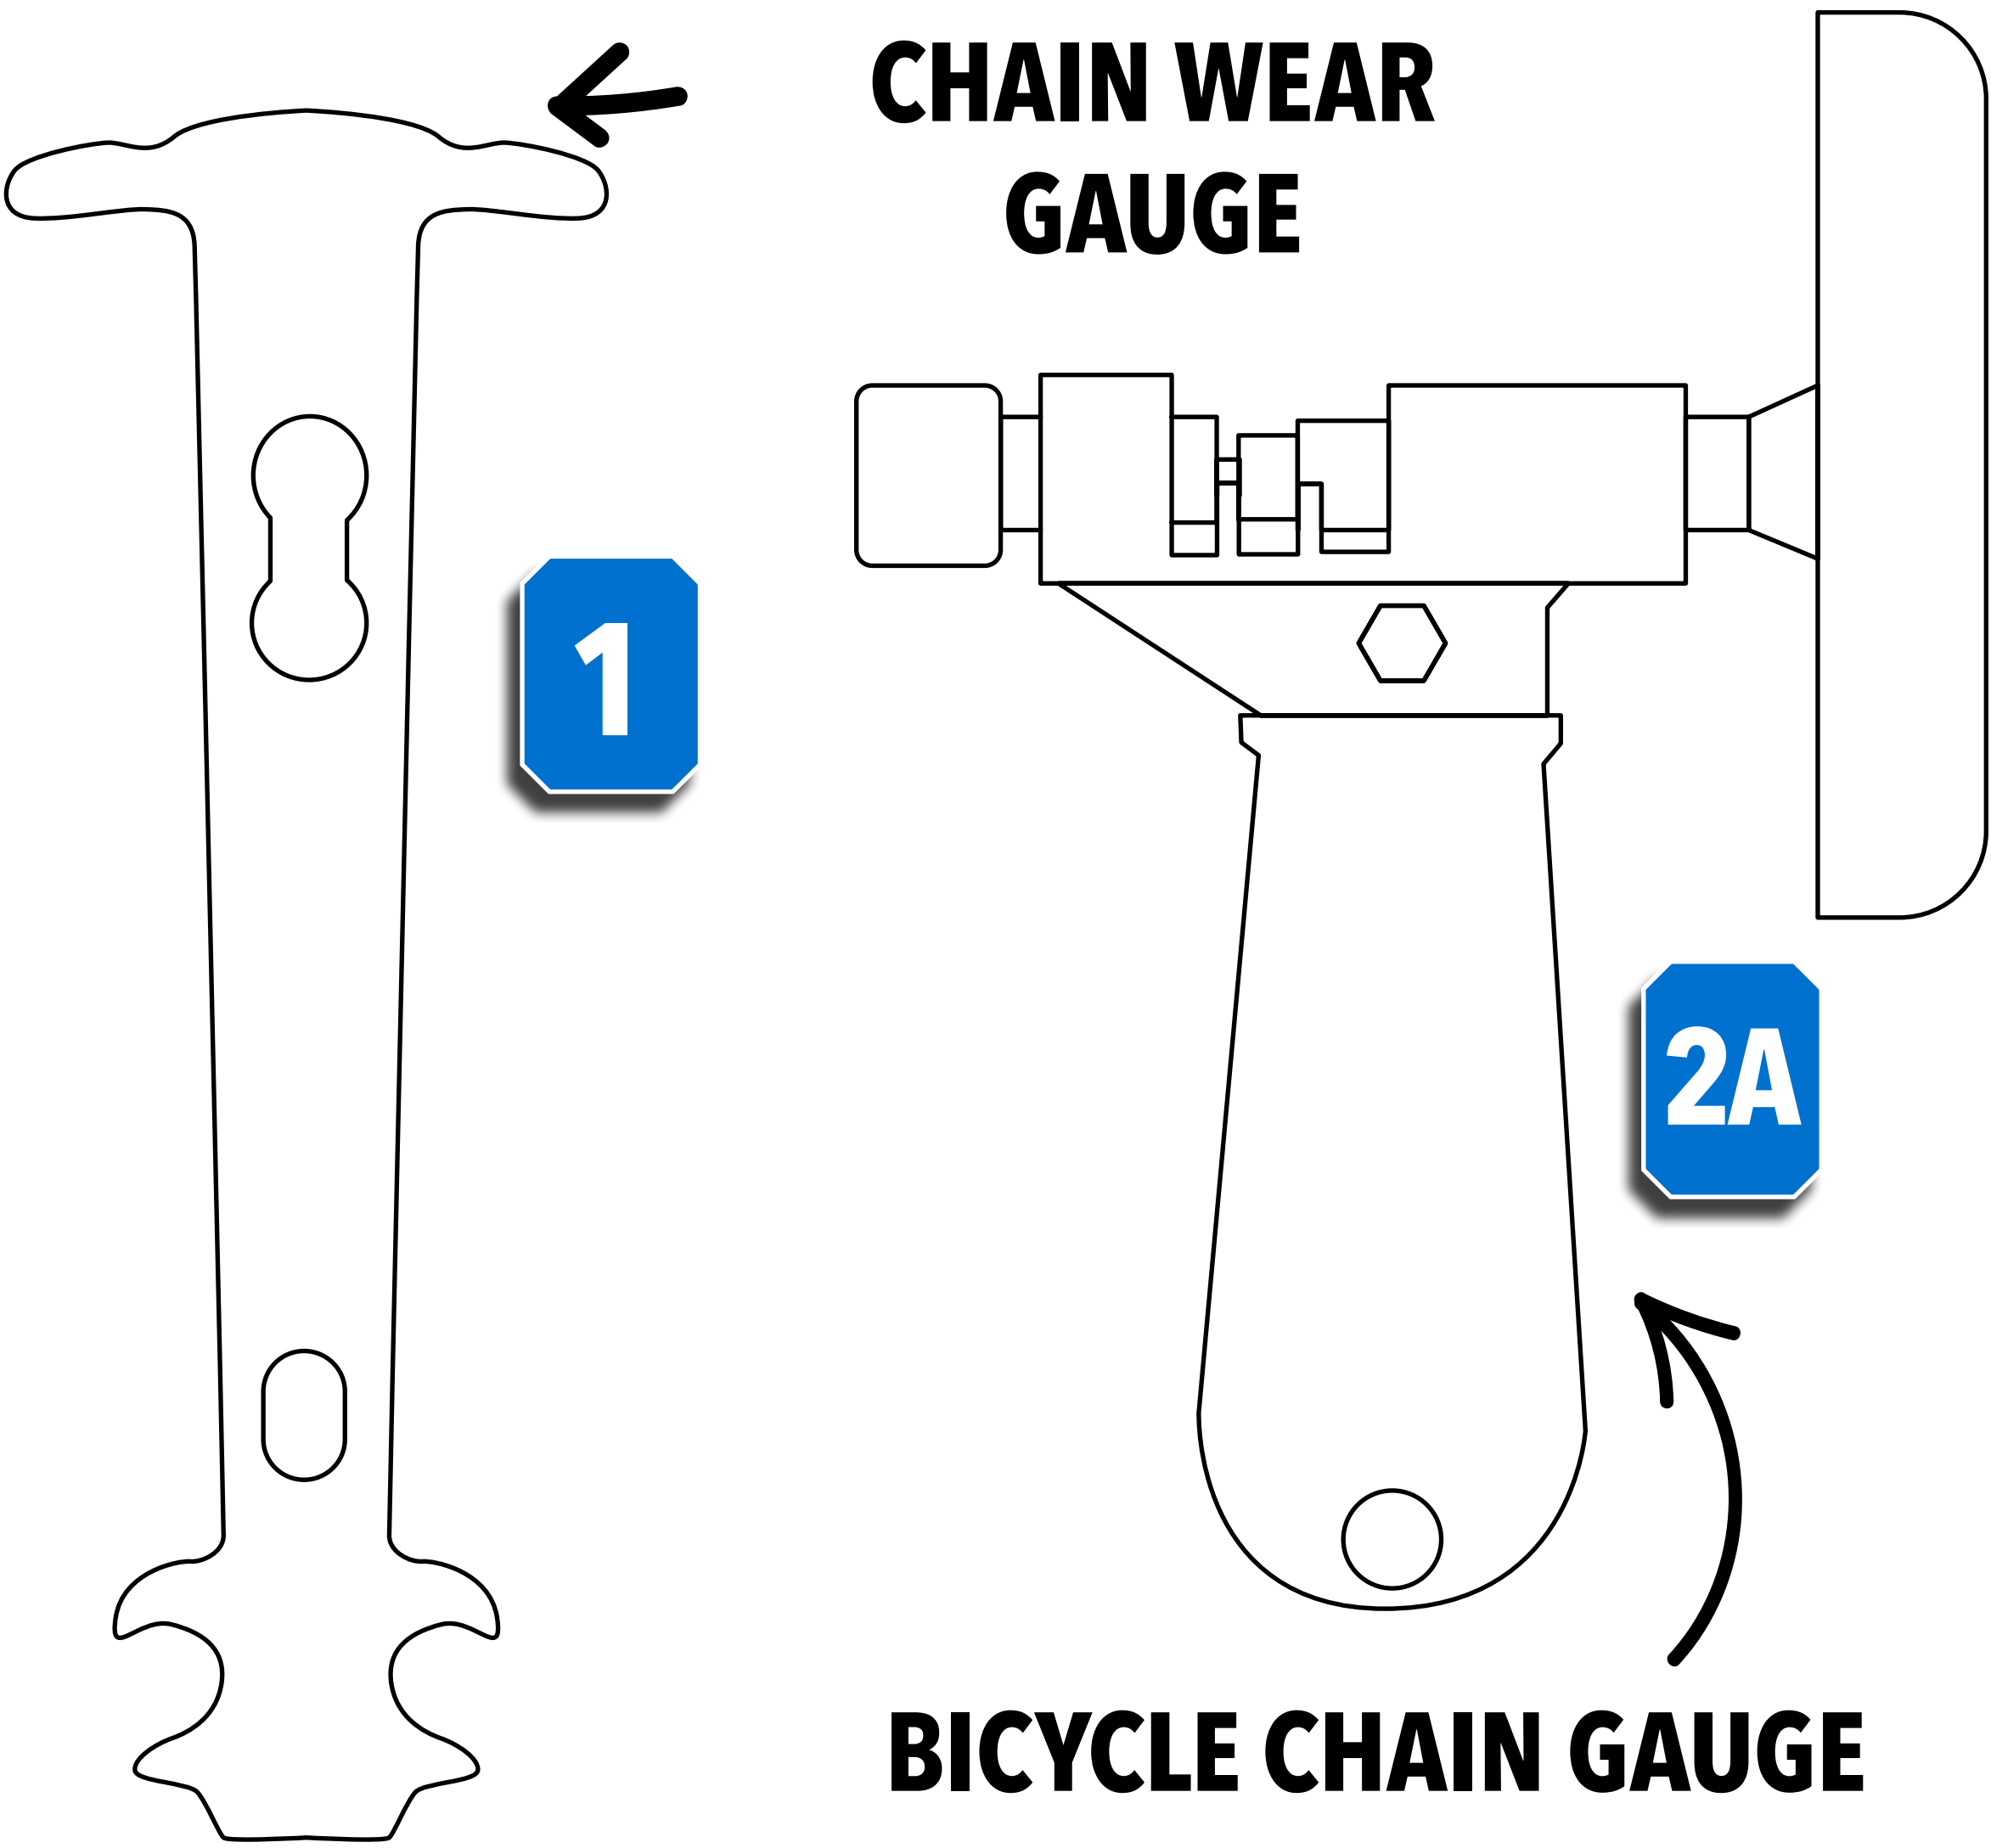

2B

THREADED SOCKET WITH HANDLE

REPLACEMENT SOCKET FOR RIVET PIN

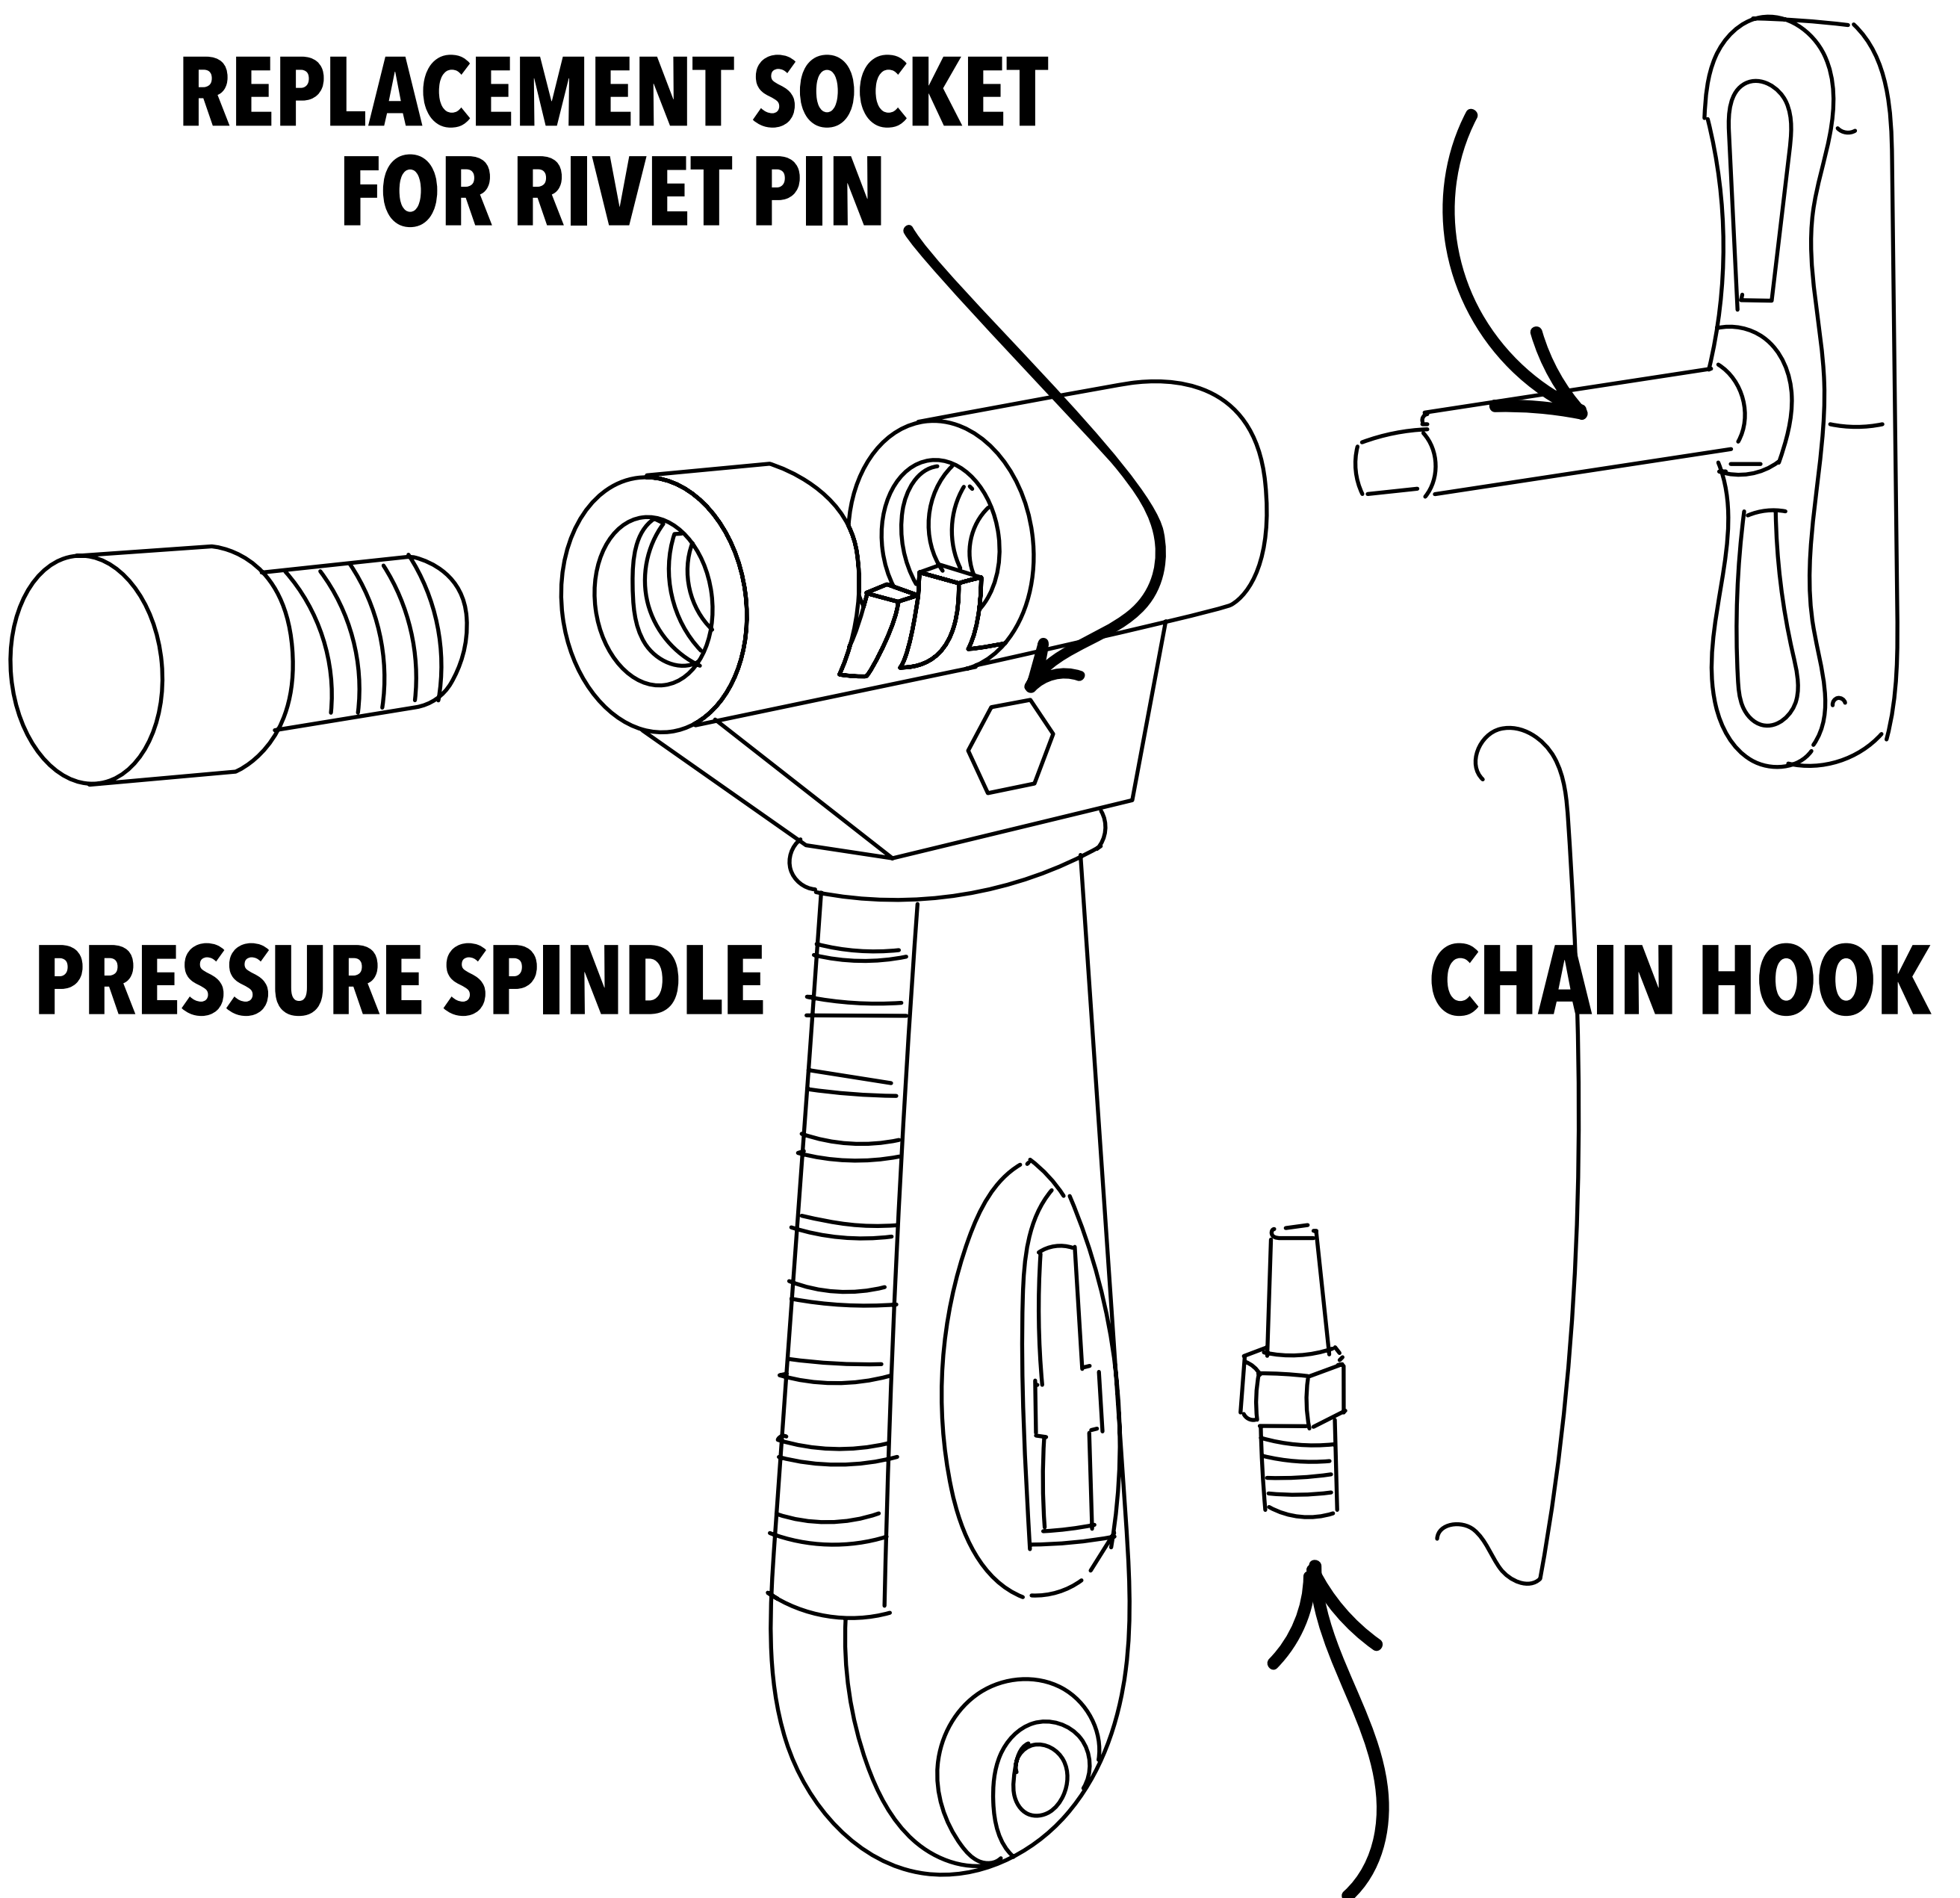


PRESSURE SPINDLE

CHAIN HOOK


REPLACEMENT RIVET PIN

NOTES


CHECKING CHAIN WEAR

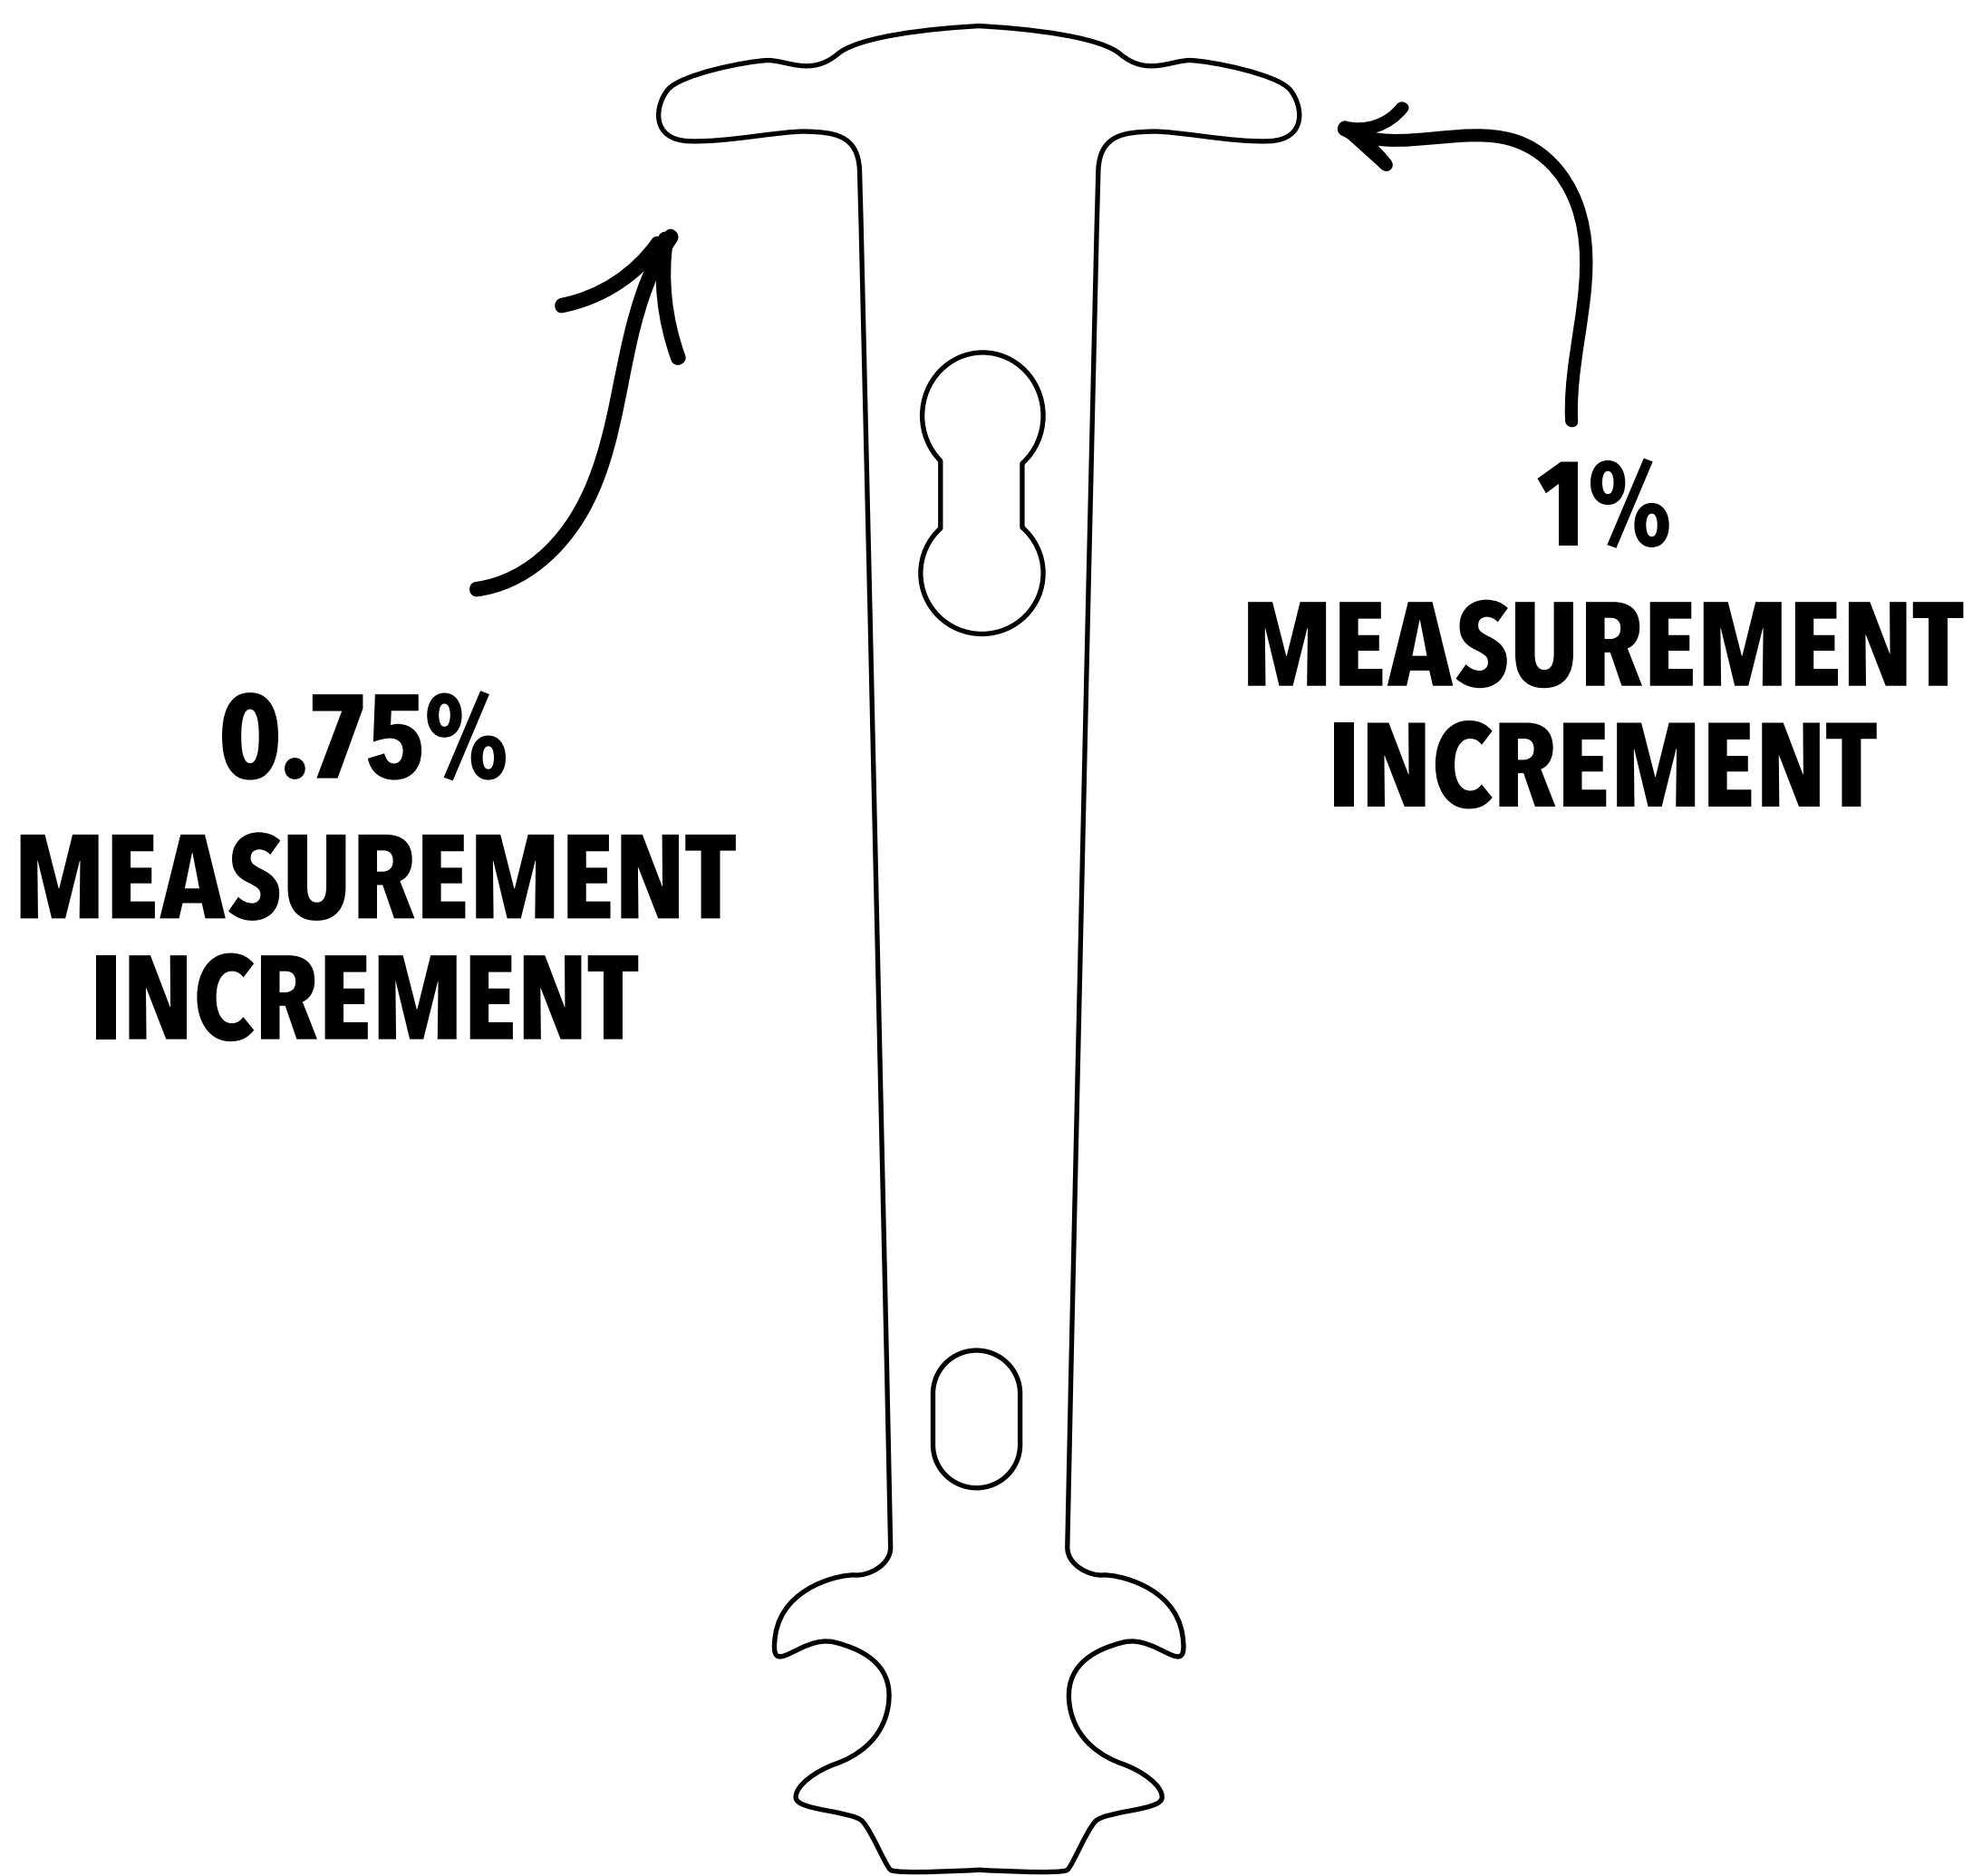

Before repairing your bike, first check the wear on your bike chain. Use the chain wear gauge for this. A worn chain should be replaced to prevent damage to the cassette and chainrings.

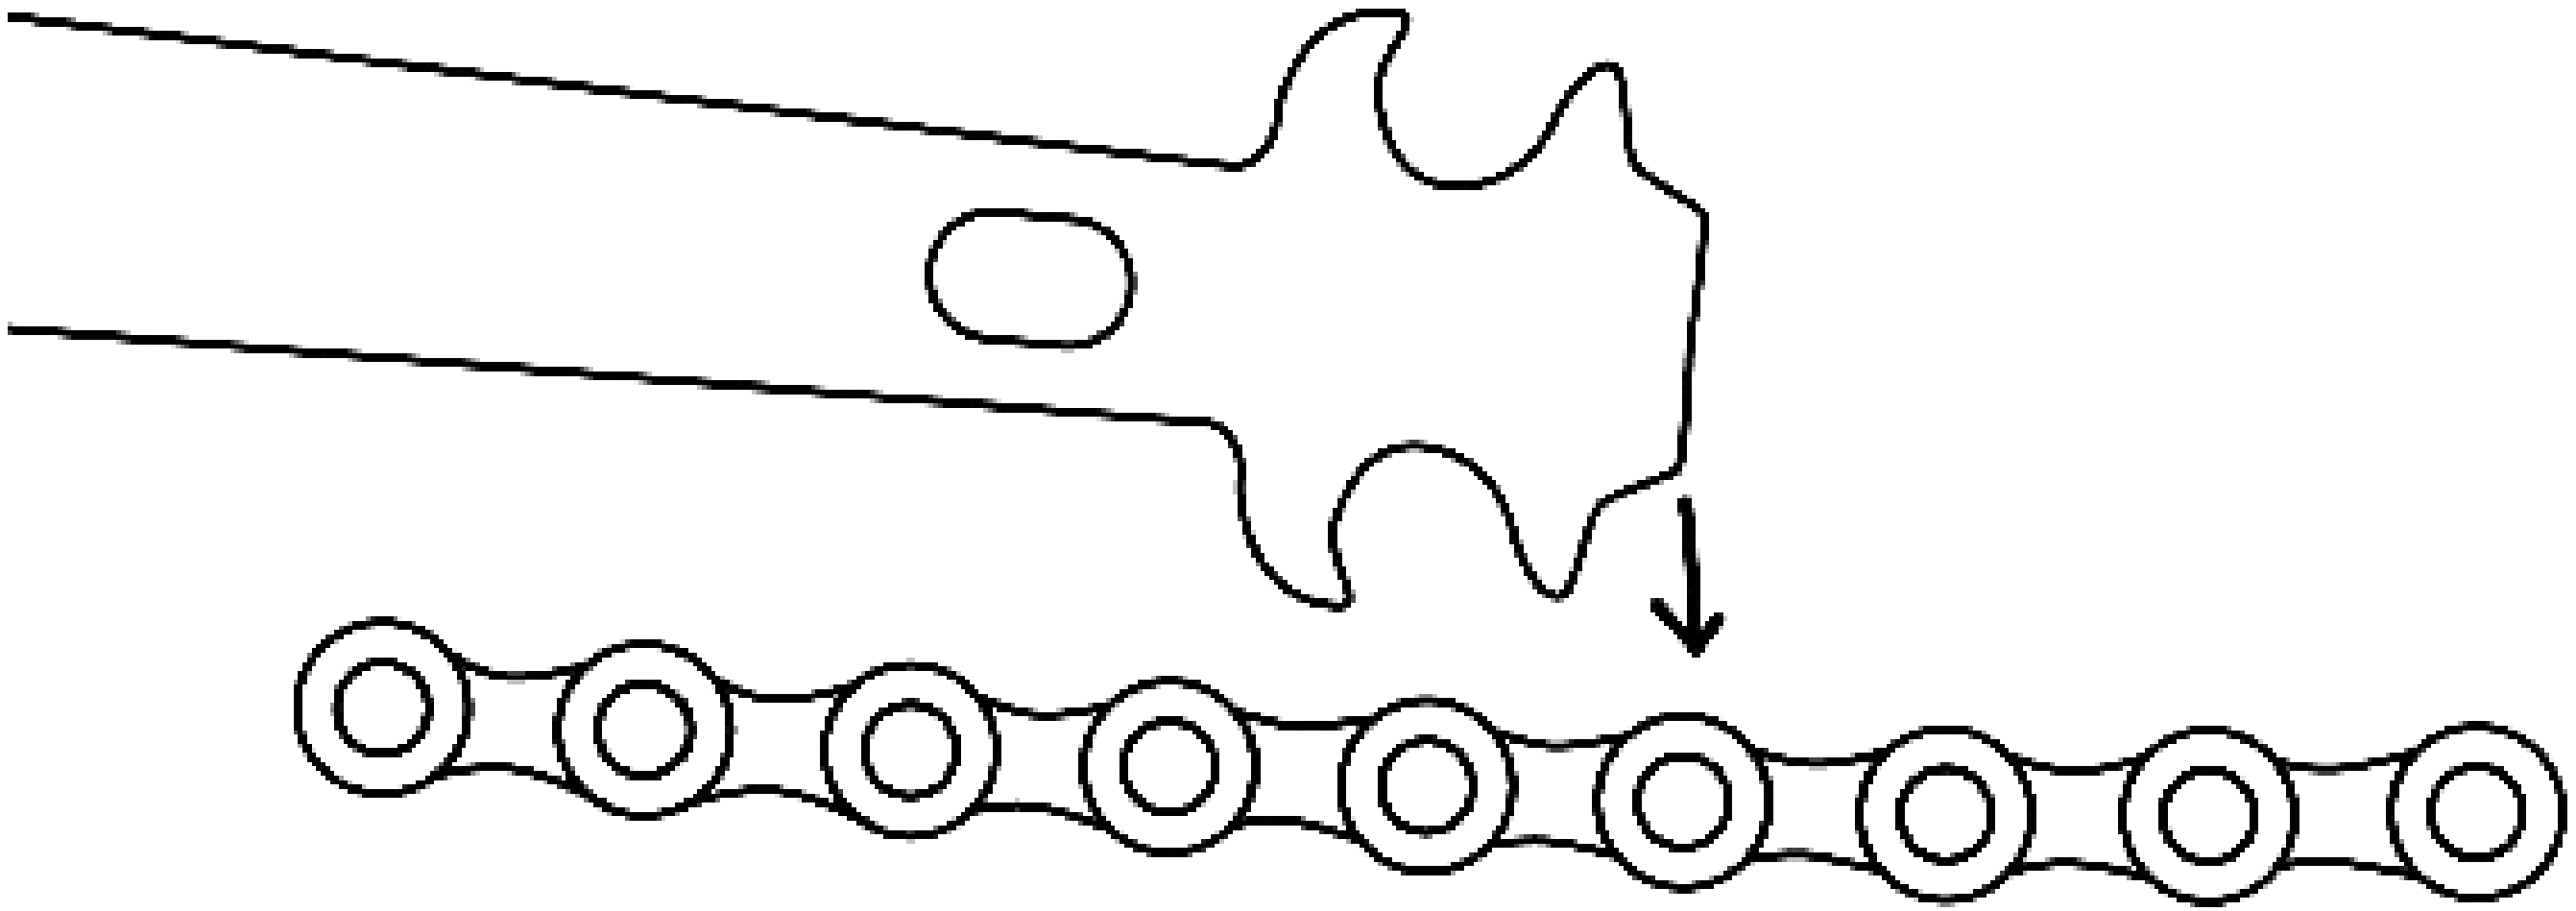


The chain wear gauge allows you to quickly and easily check the elongation of the bike chain.

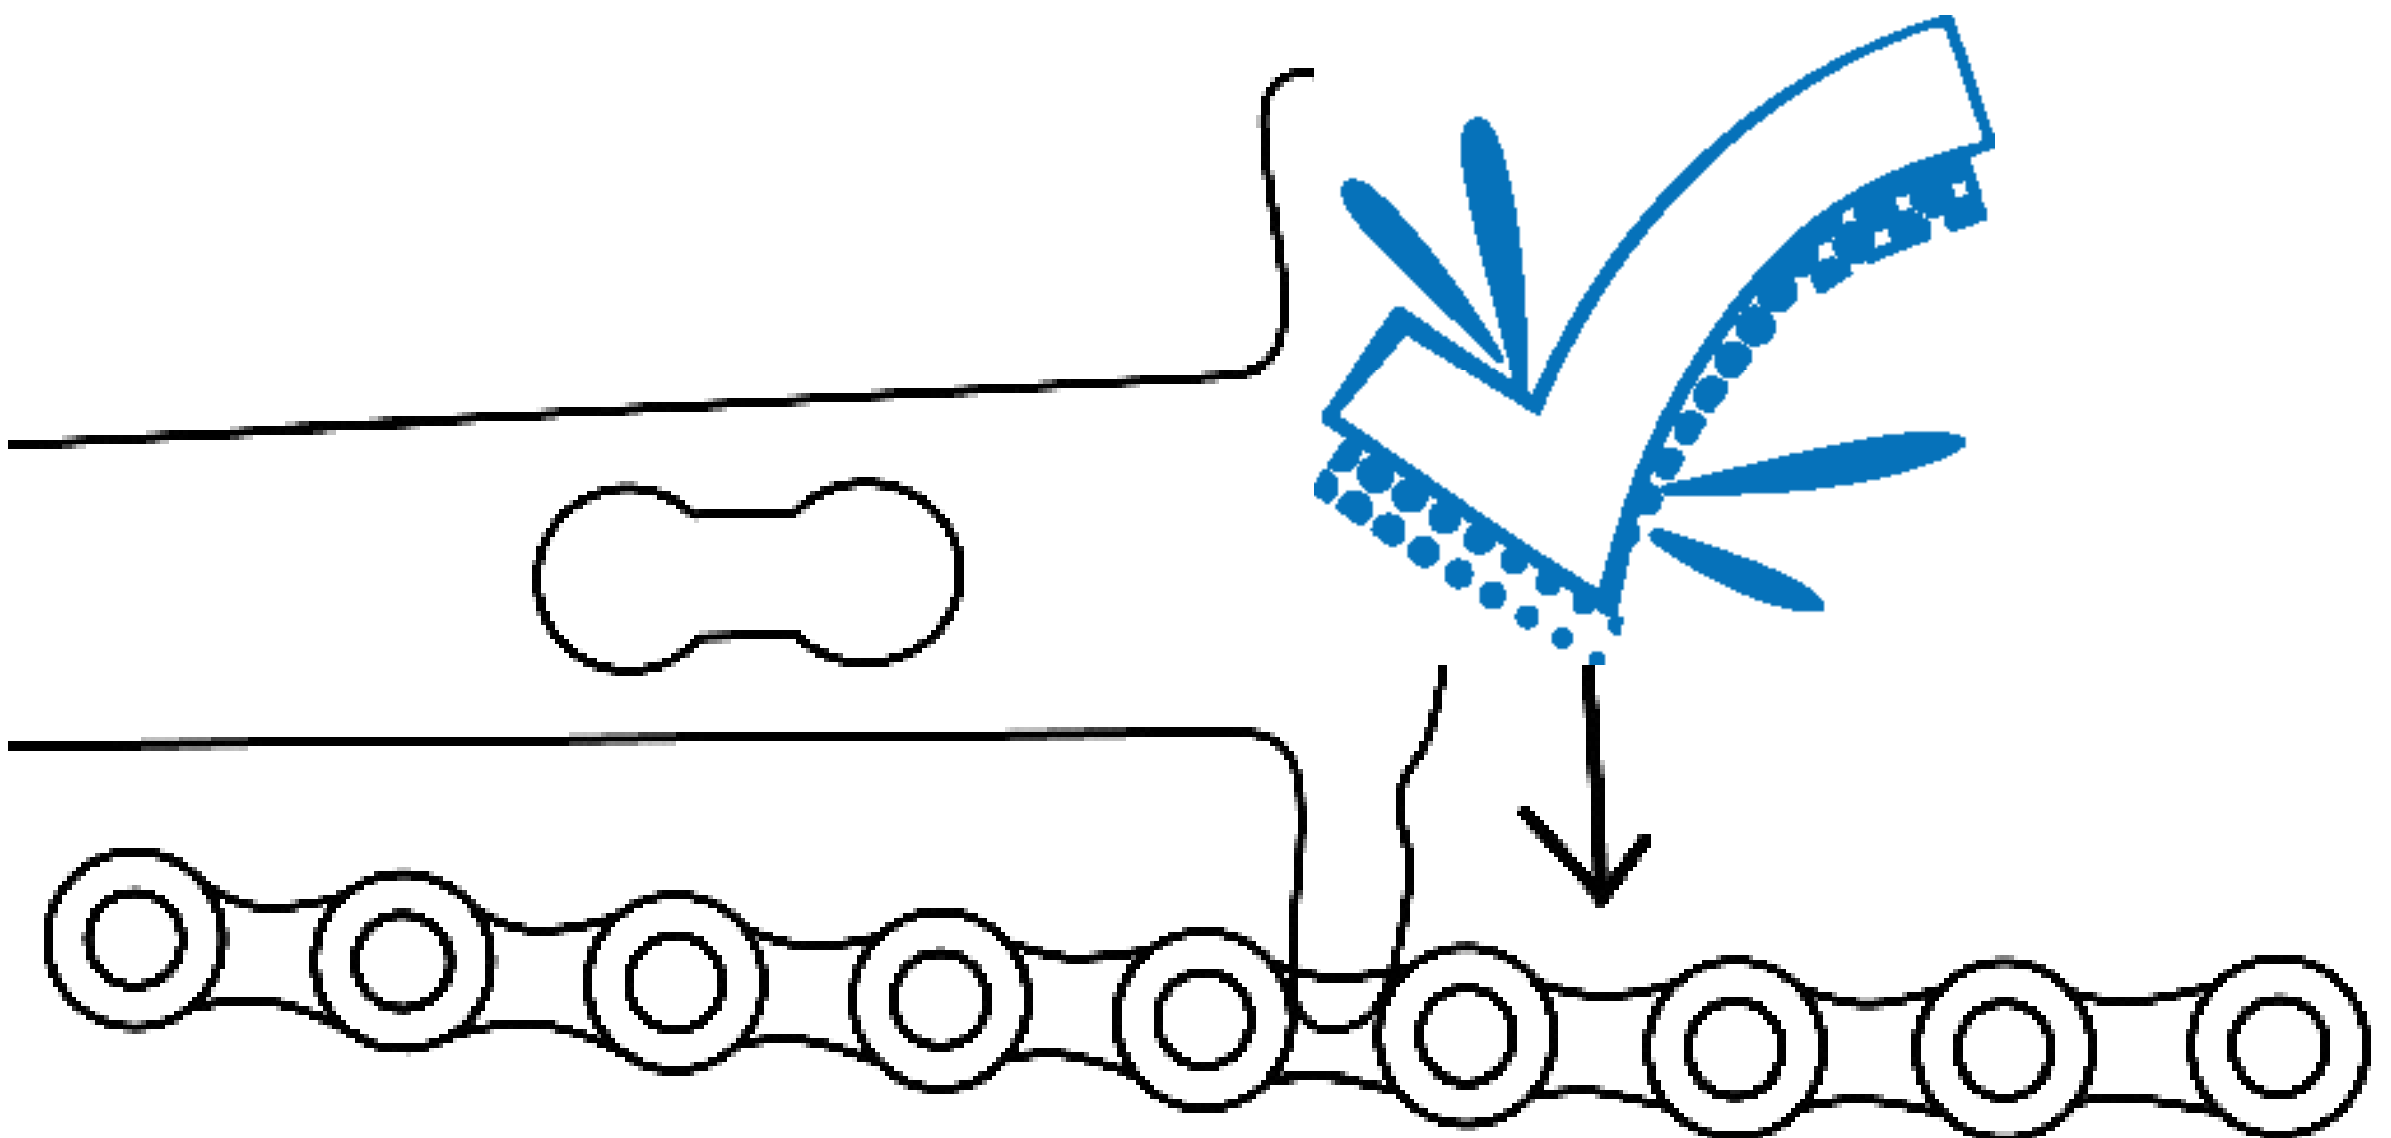


If the chain wear gauge cannot be fully inserted into the chain, the wear is below the specified limit. The chain can still be used.



If the chain wear gauge can be fully inserted, the chain has reached or exceeded the specified wear limit and should be replaced.

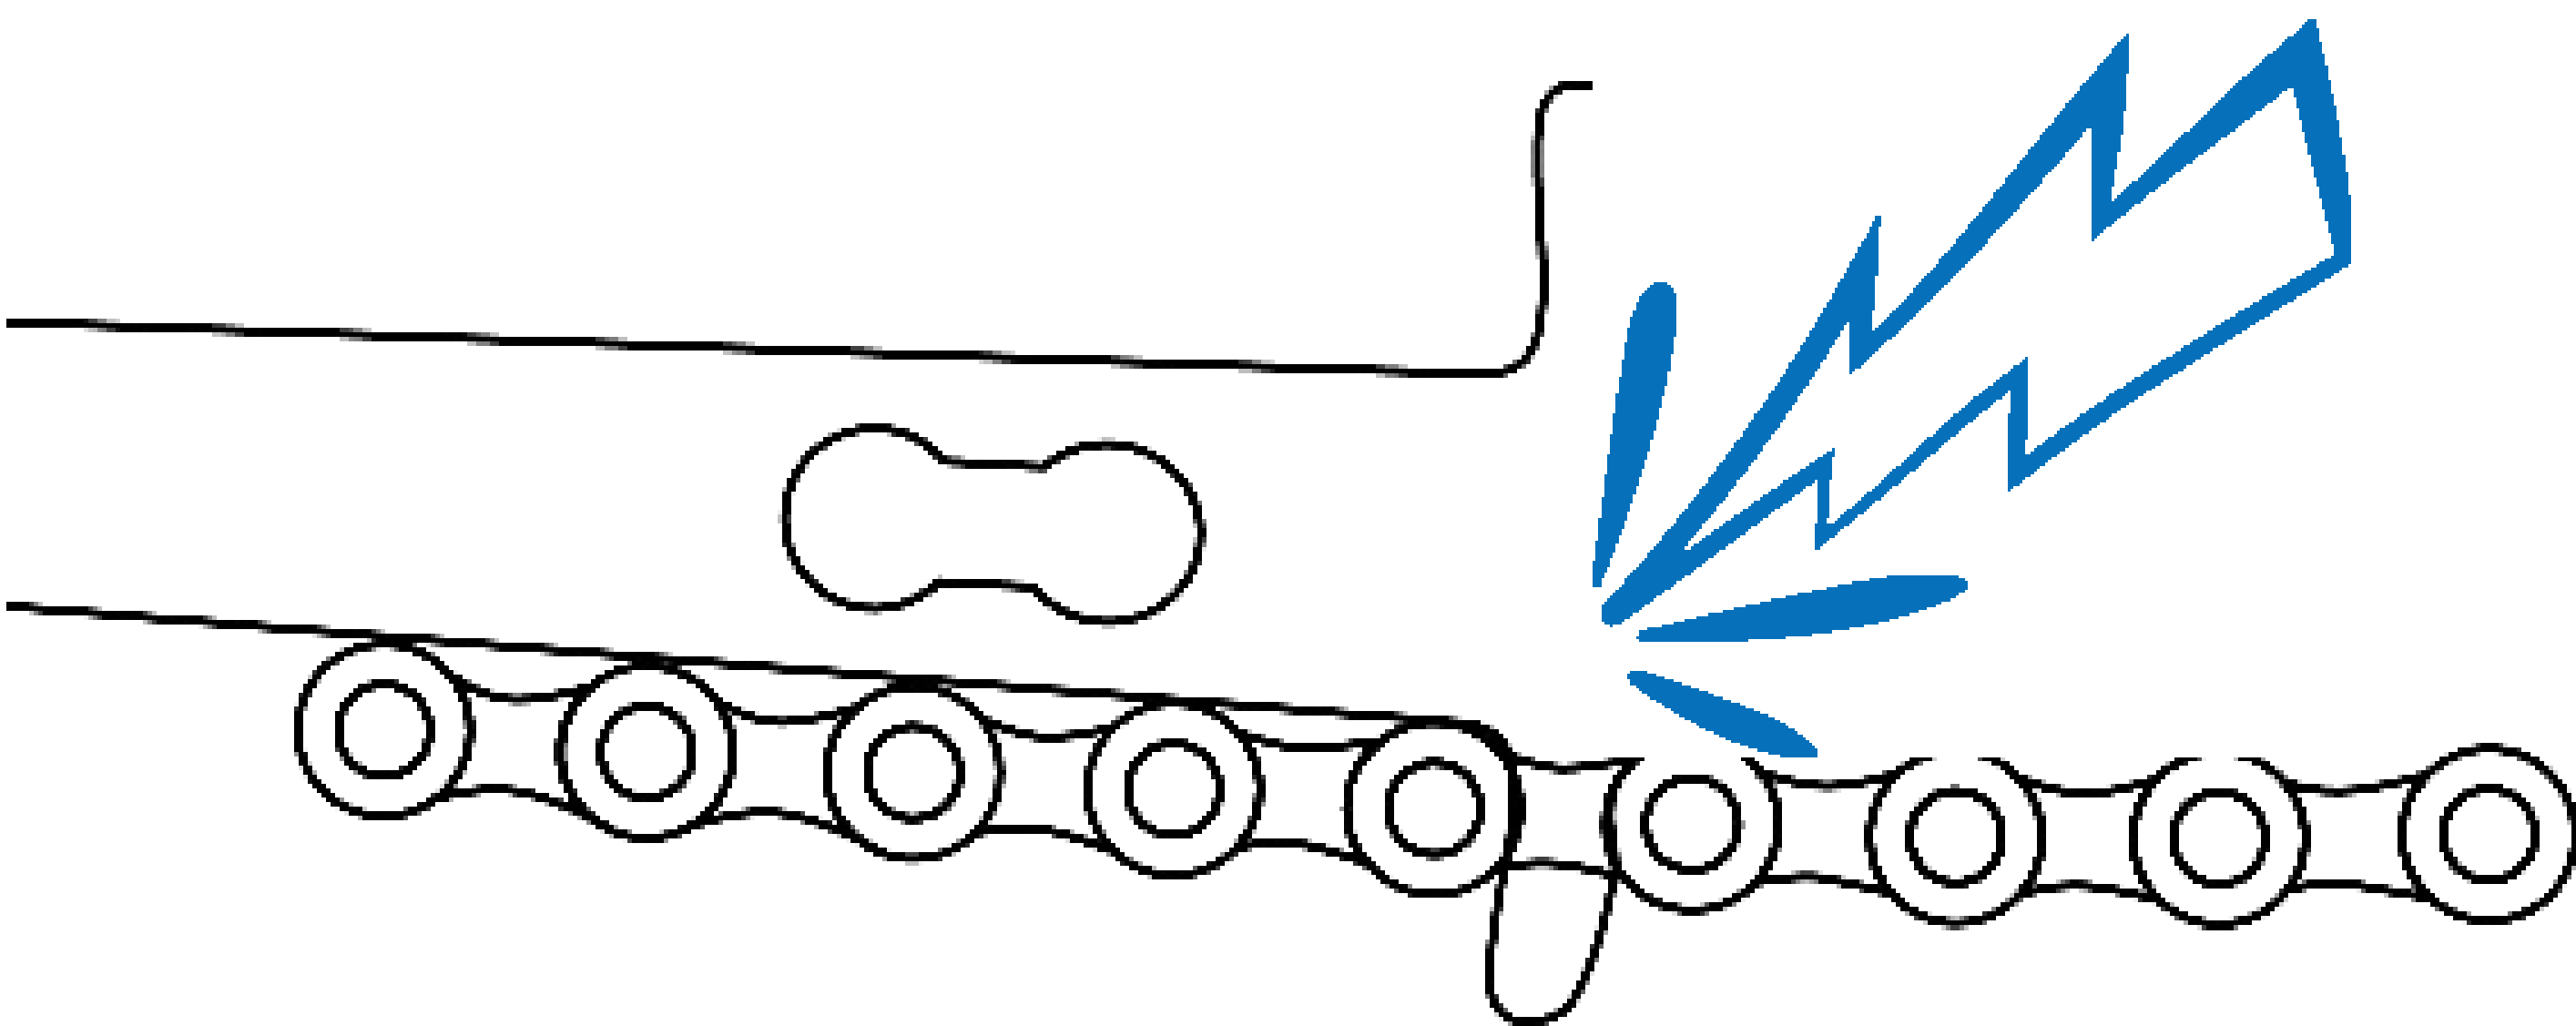

CUSTOMER SERVICE

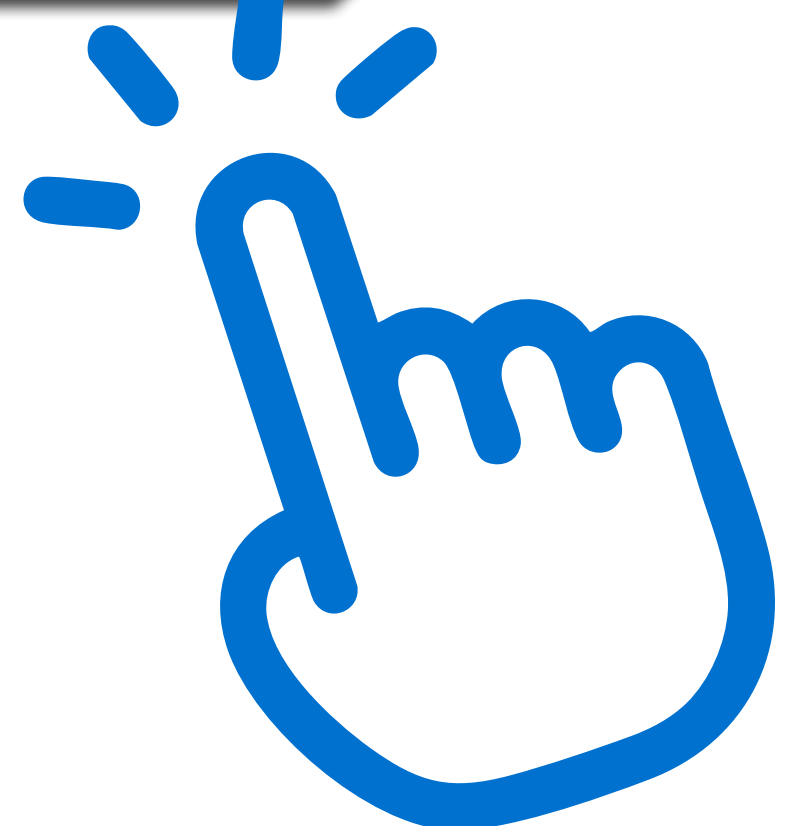


USAGE

REPLACING CHAIN LINKS


A

Use the chain hook to take the tension off the bicycle chain so that the link to be removed is fully accessible. The chain should first be removed from the cassette and chainring.

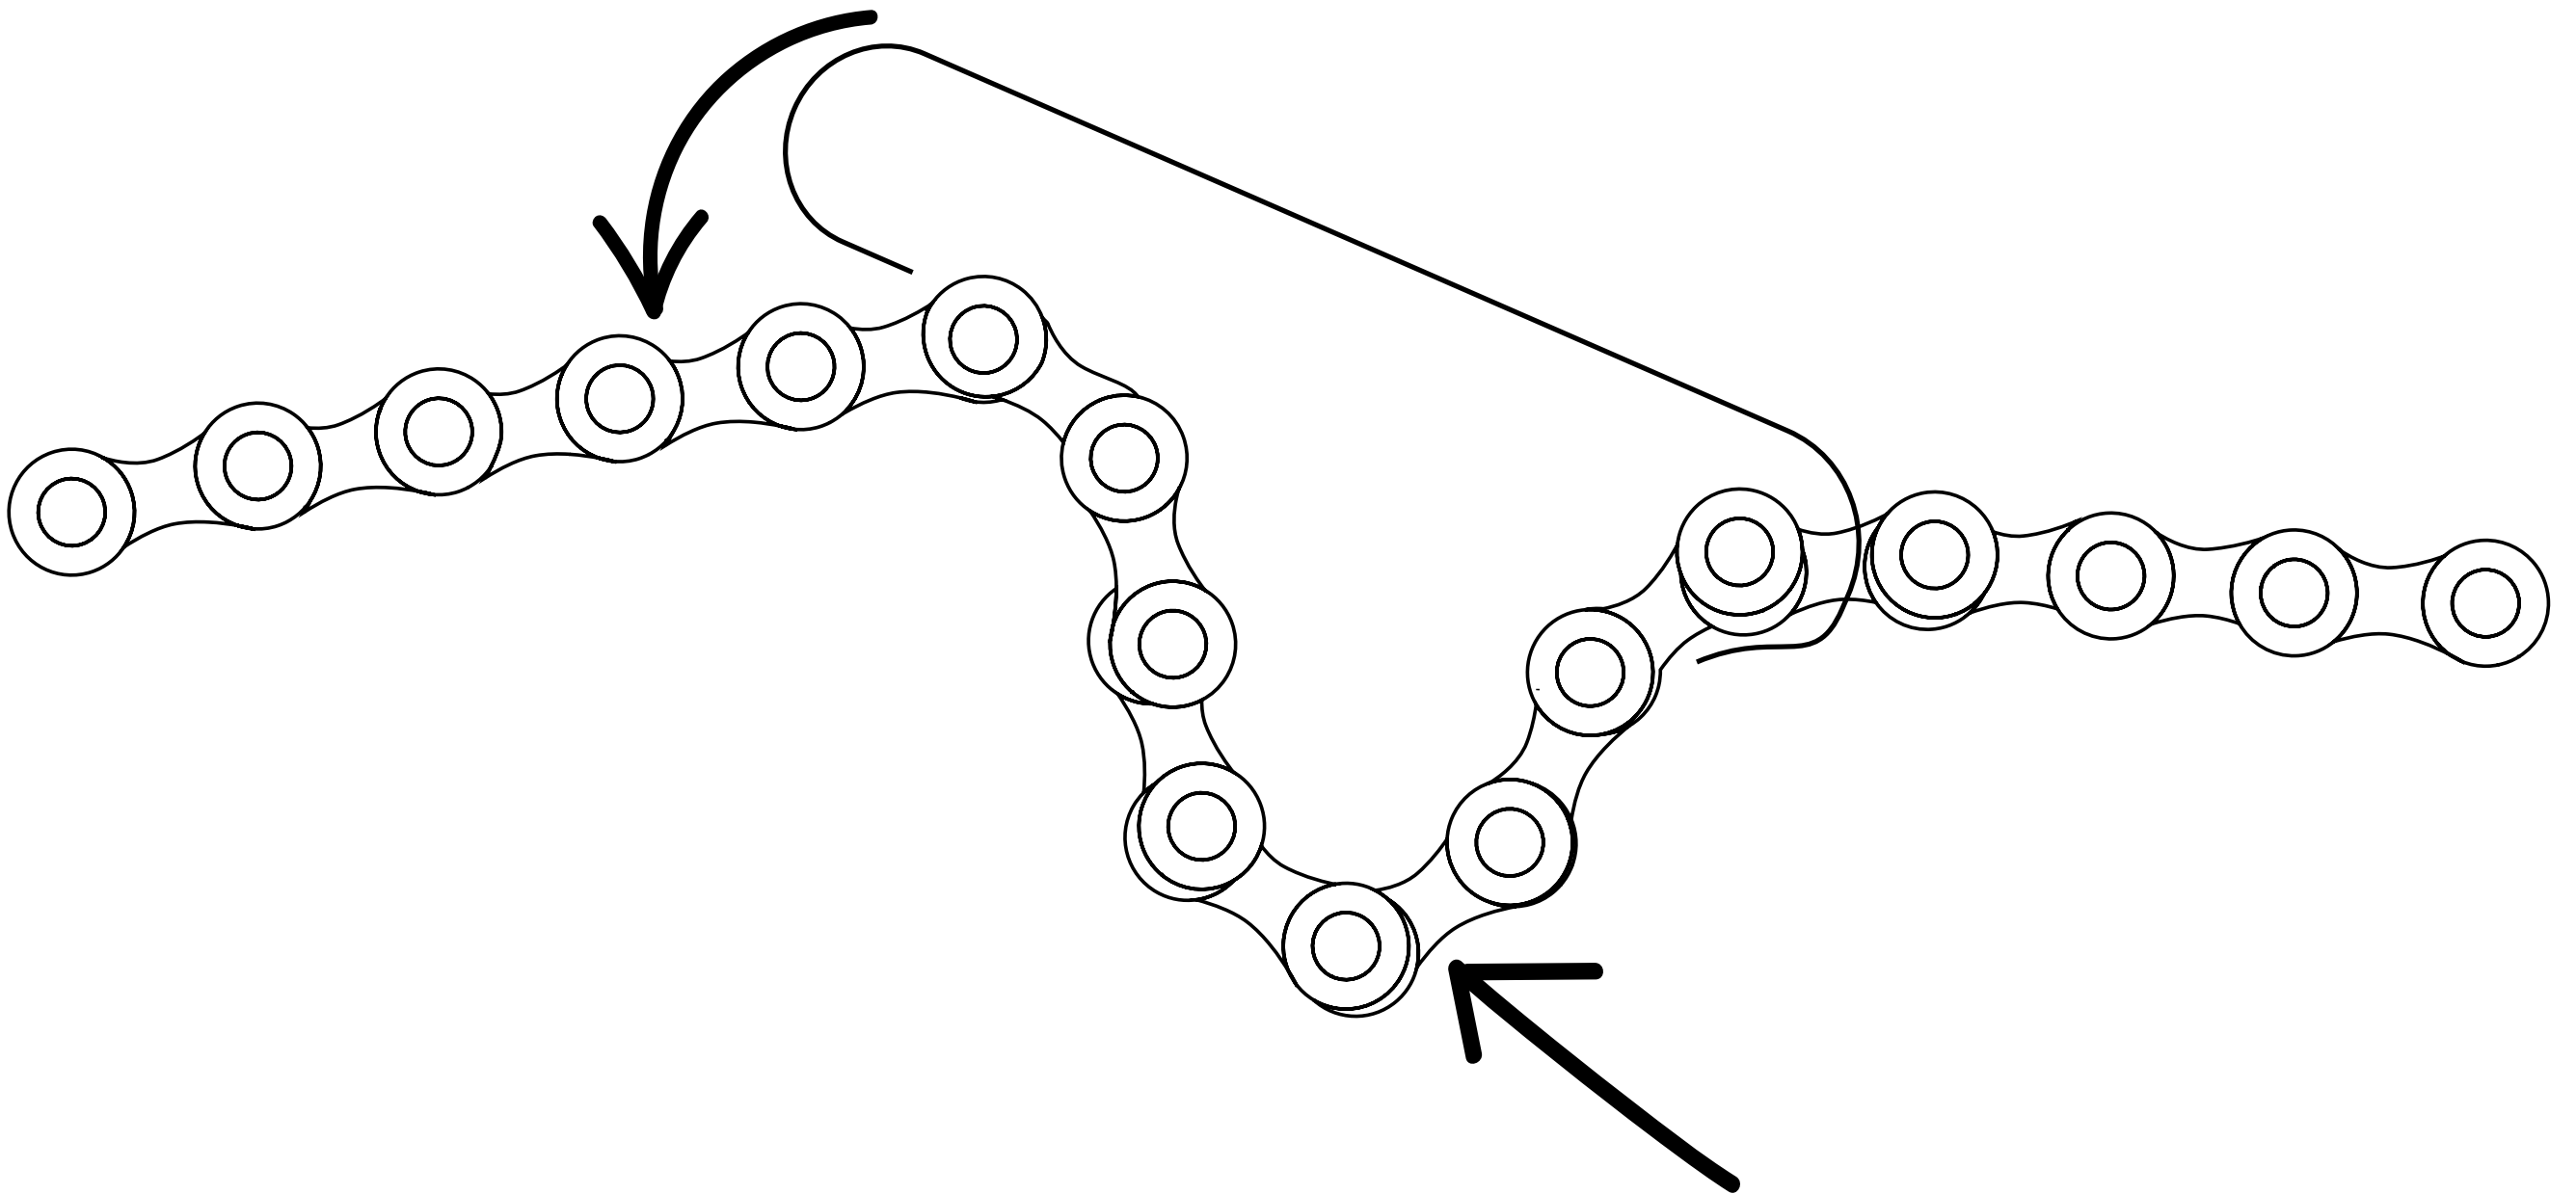


Damaged Chain Link


B

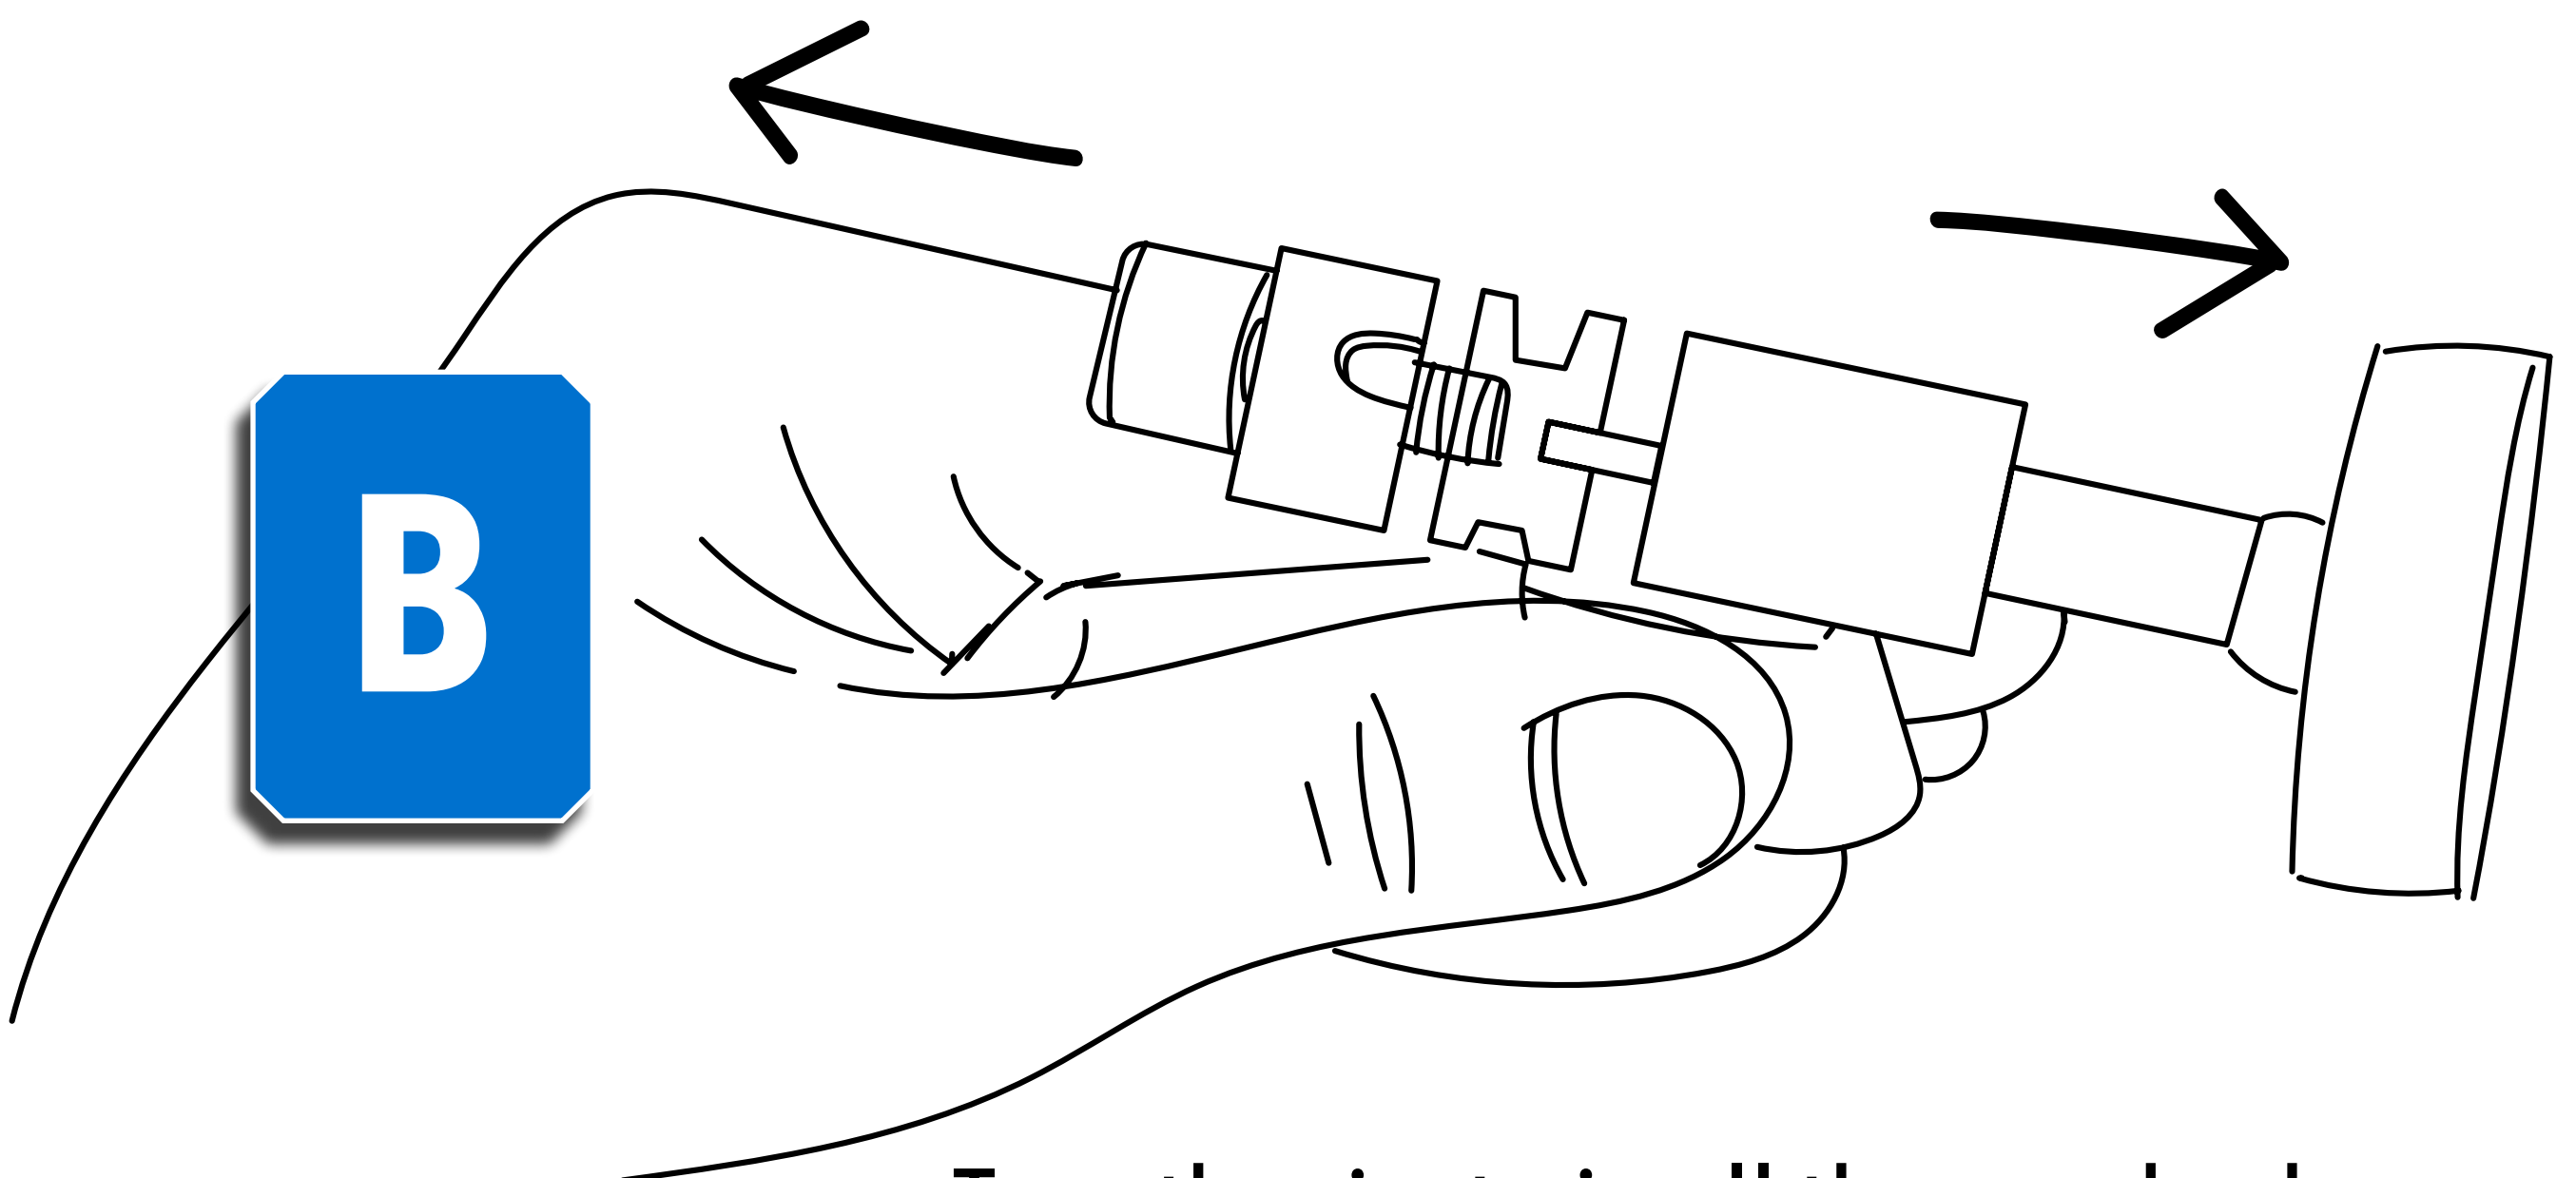

Turn the rivet pin all the way back until there is enough space to insert the chain into the chain tool.

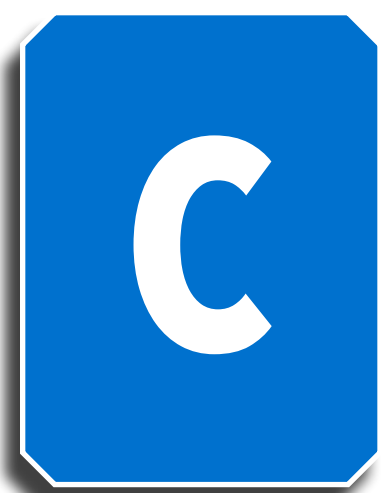



Insert the chain into the chain tool and align the rivet pin centrally with the chain pin. Then carefully tighten the spindle.

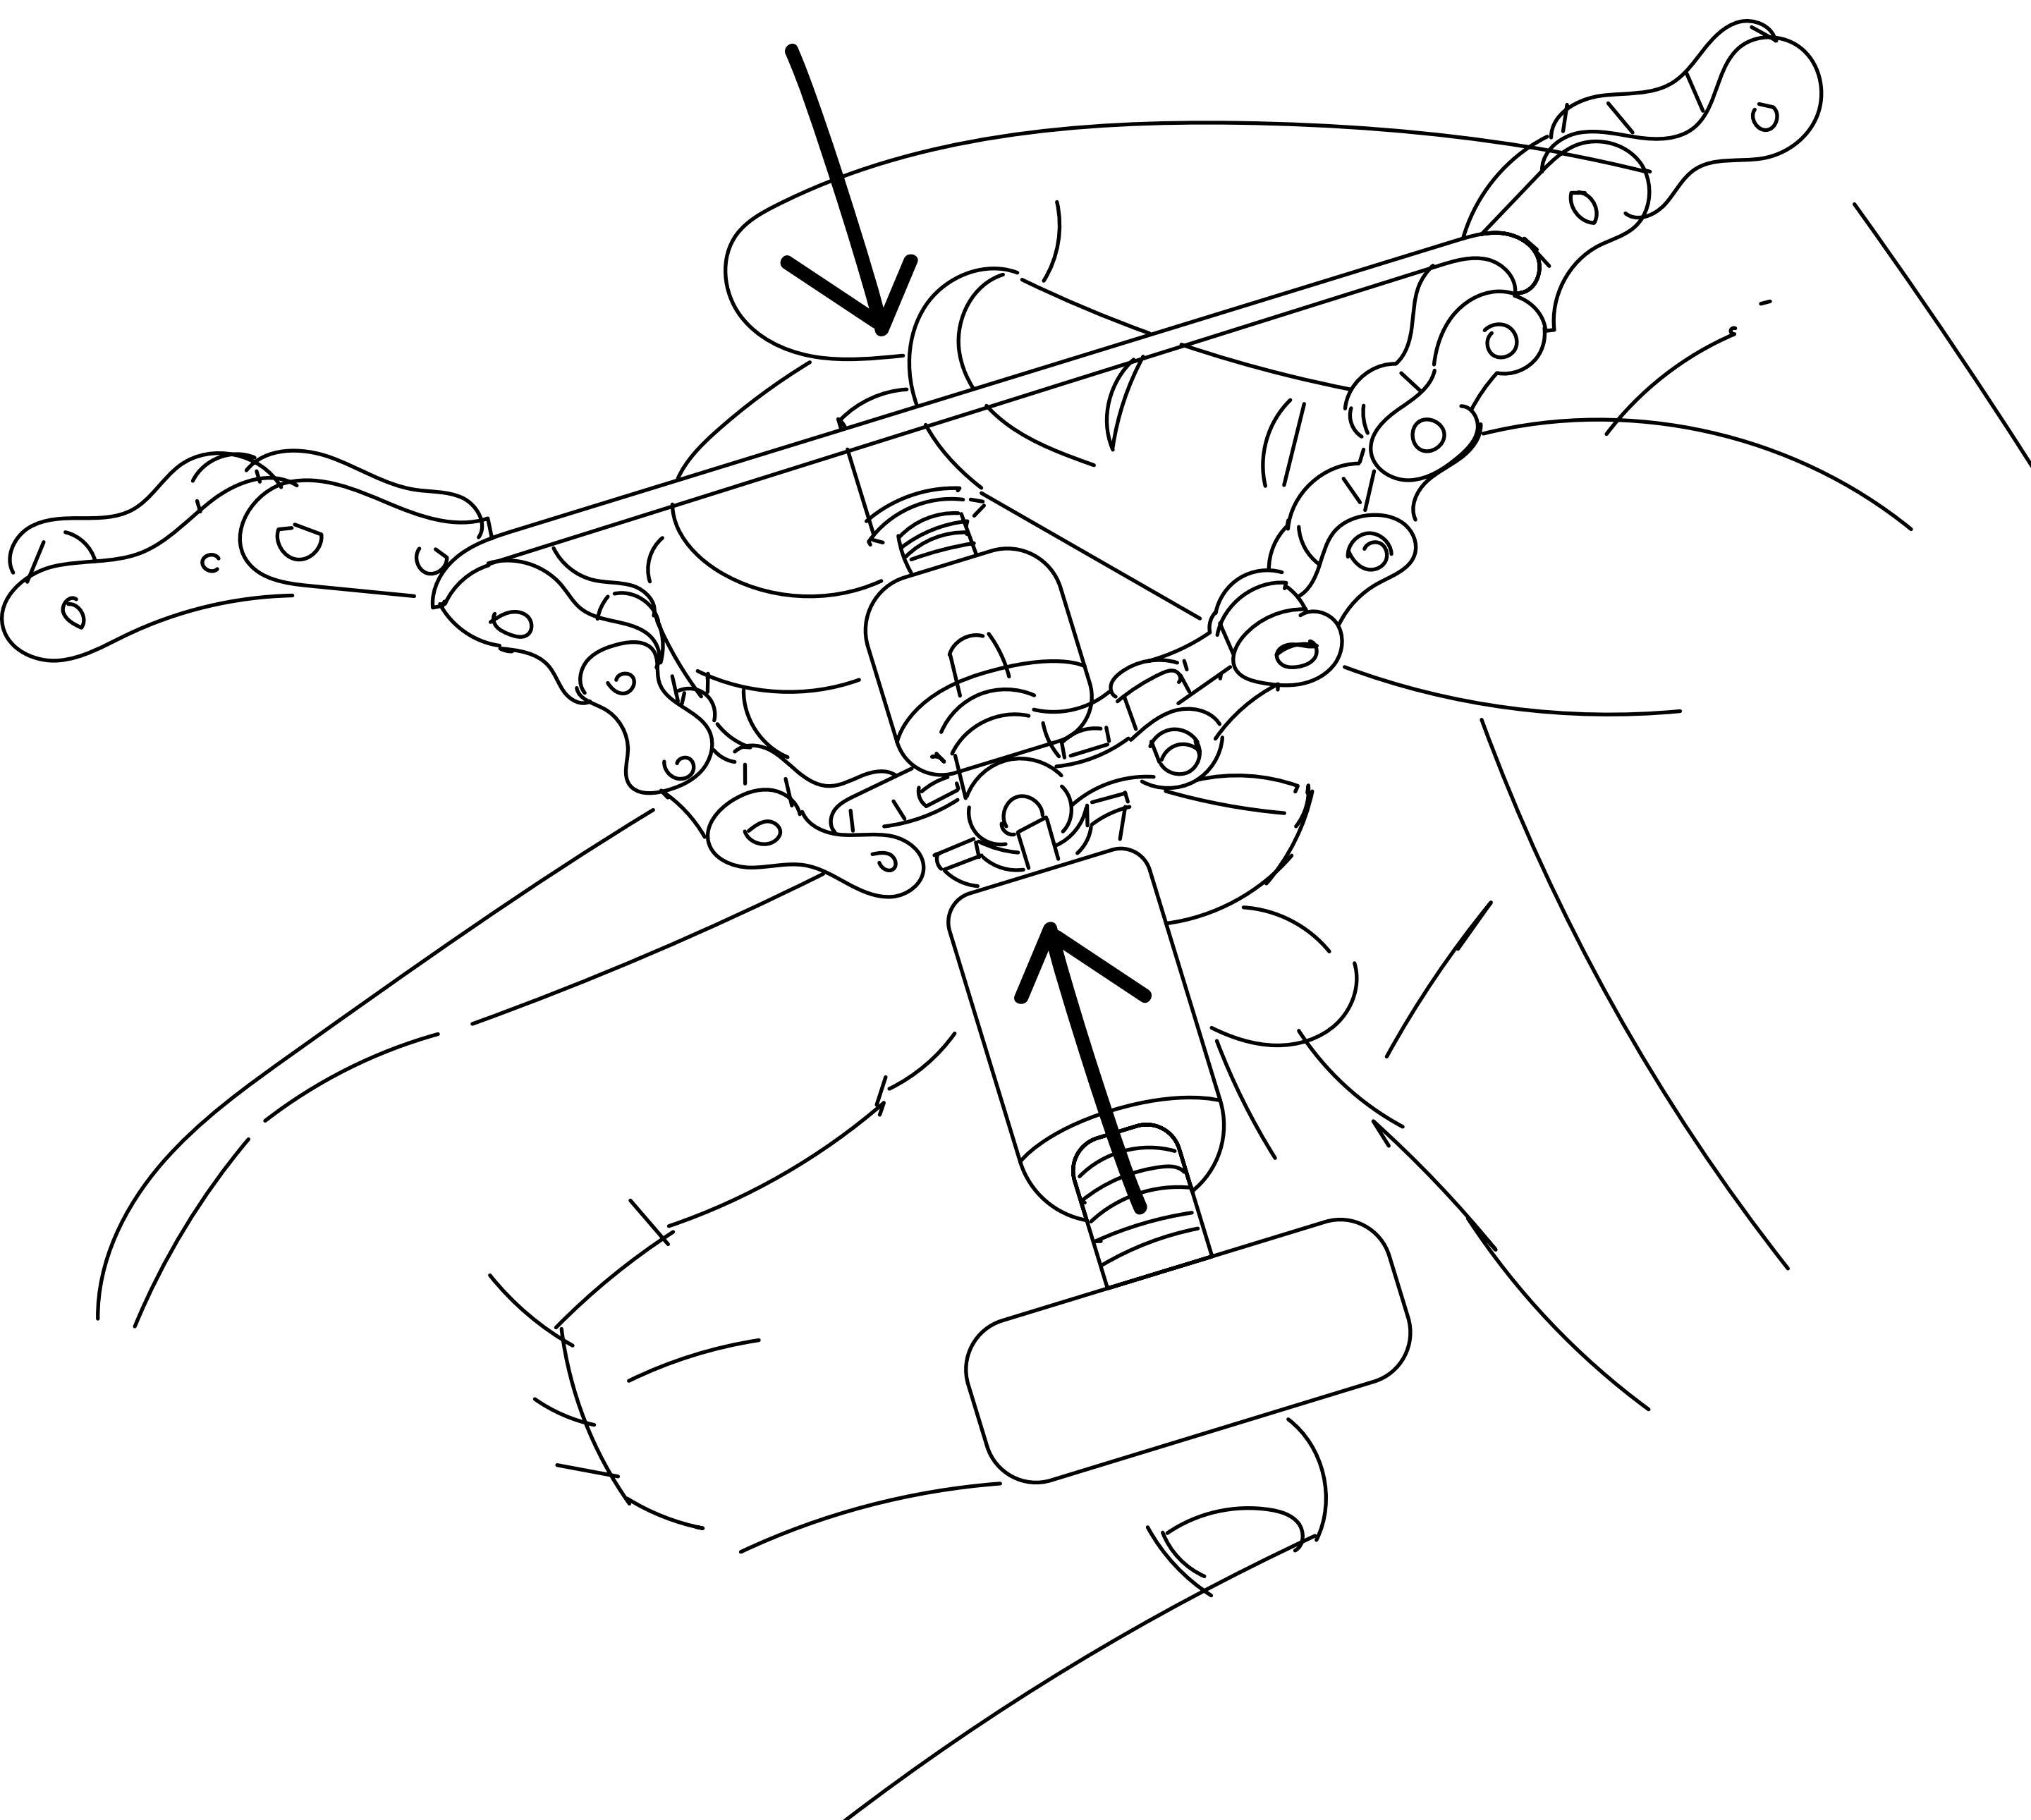




Continue tightening the spindle until the chain pin is pushed out far enough and the damaged chain link can be removed. If turning becomes difficult, briefly turn the spindle back and then continue turning.

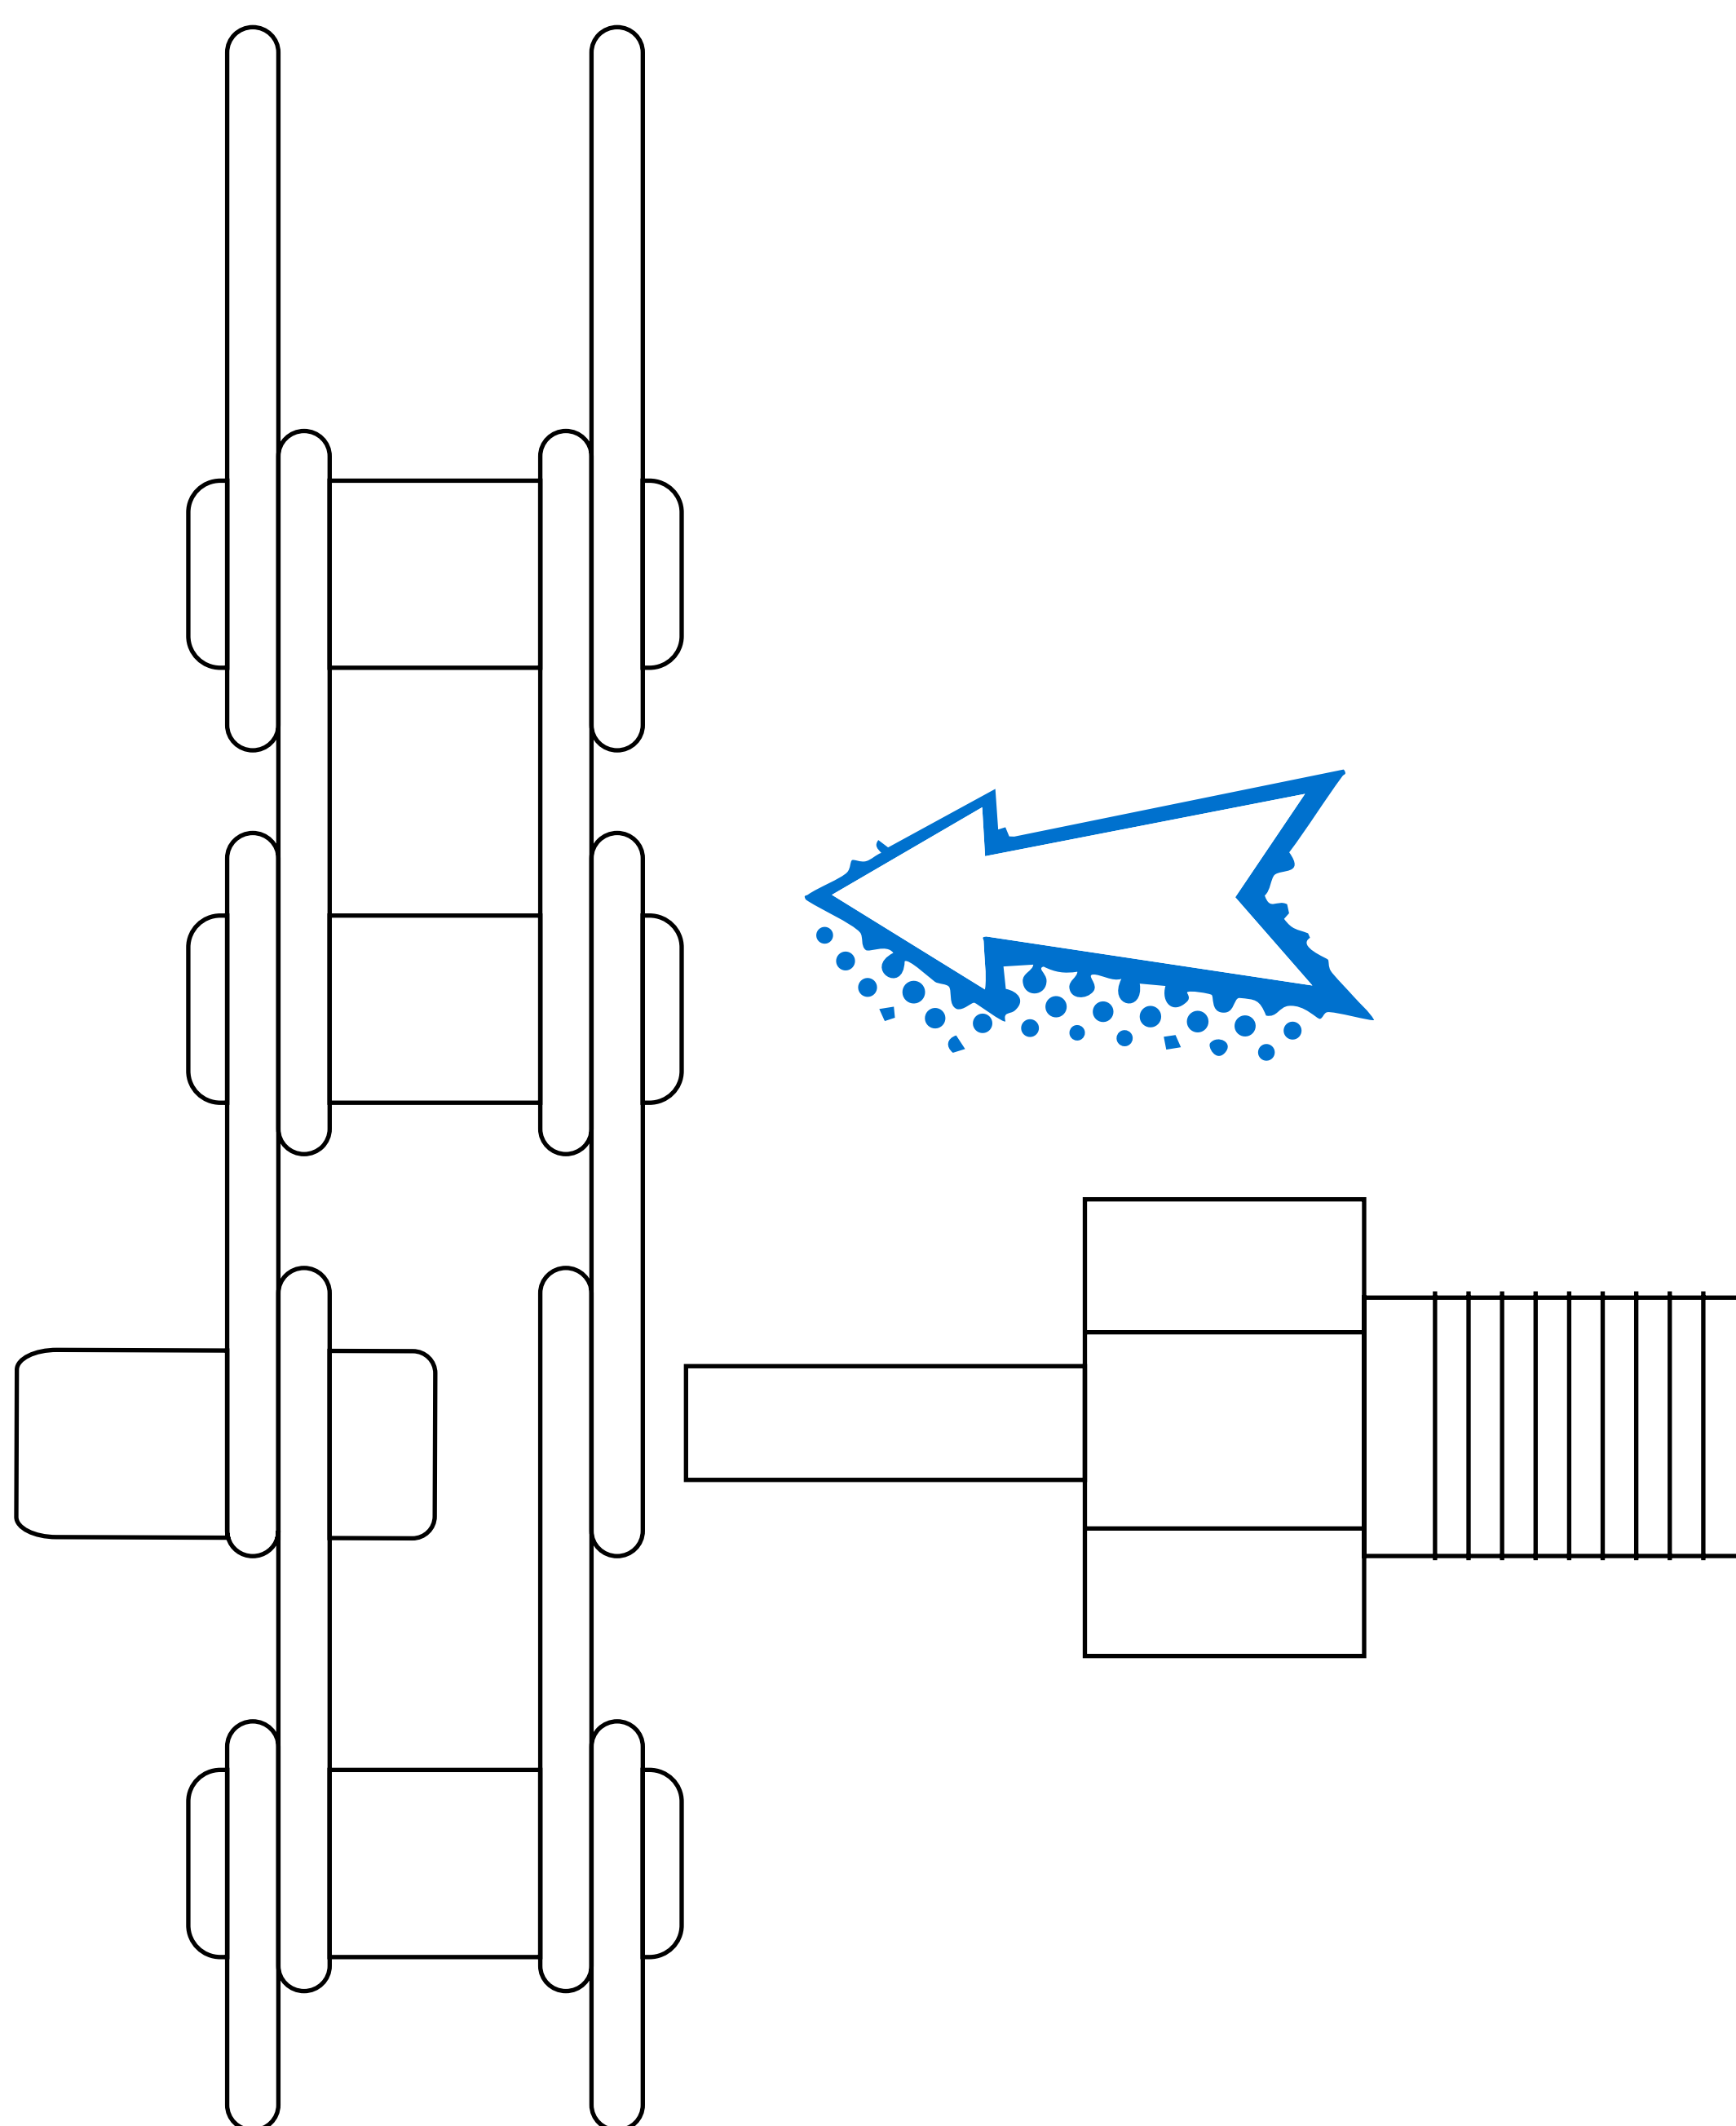

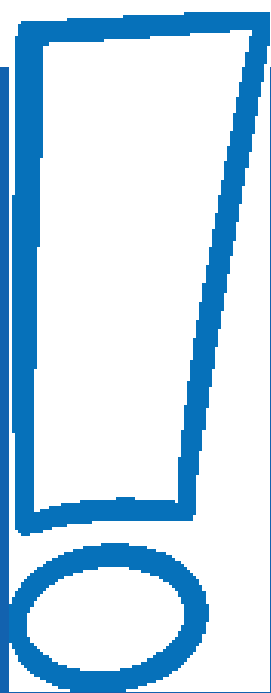


Reconnecting chain links:

If you want to connect the bicycle chain using one of the included chain locks, you can skip this step and proceed directly to Step F.

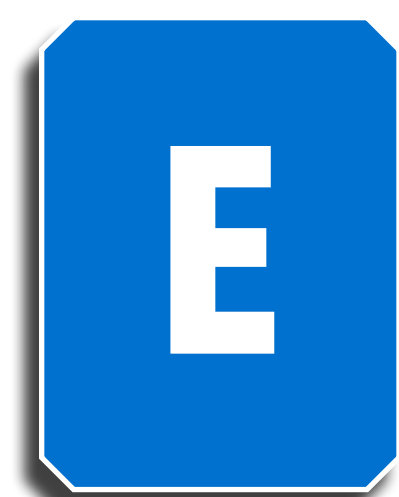

Align the chain pin in the chain tool and carefully push it back into the chain link. Make sure to center the chain pin so that the connection remains smooth.

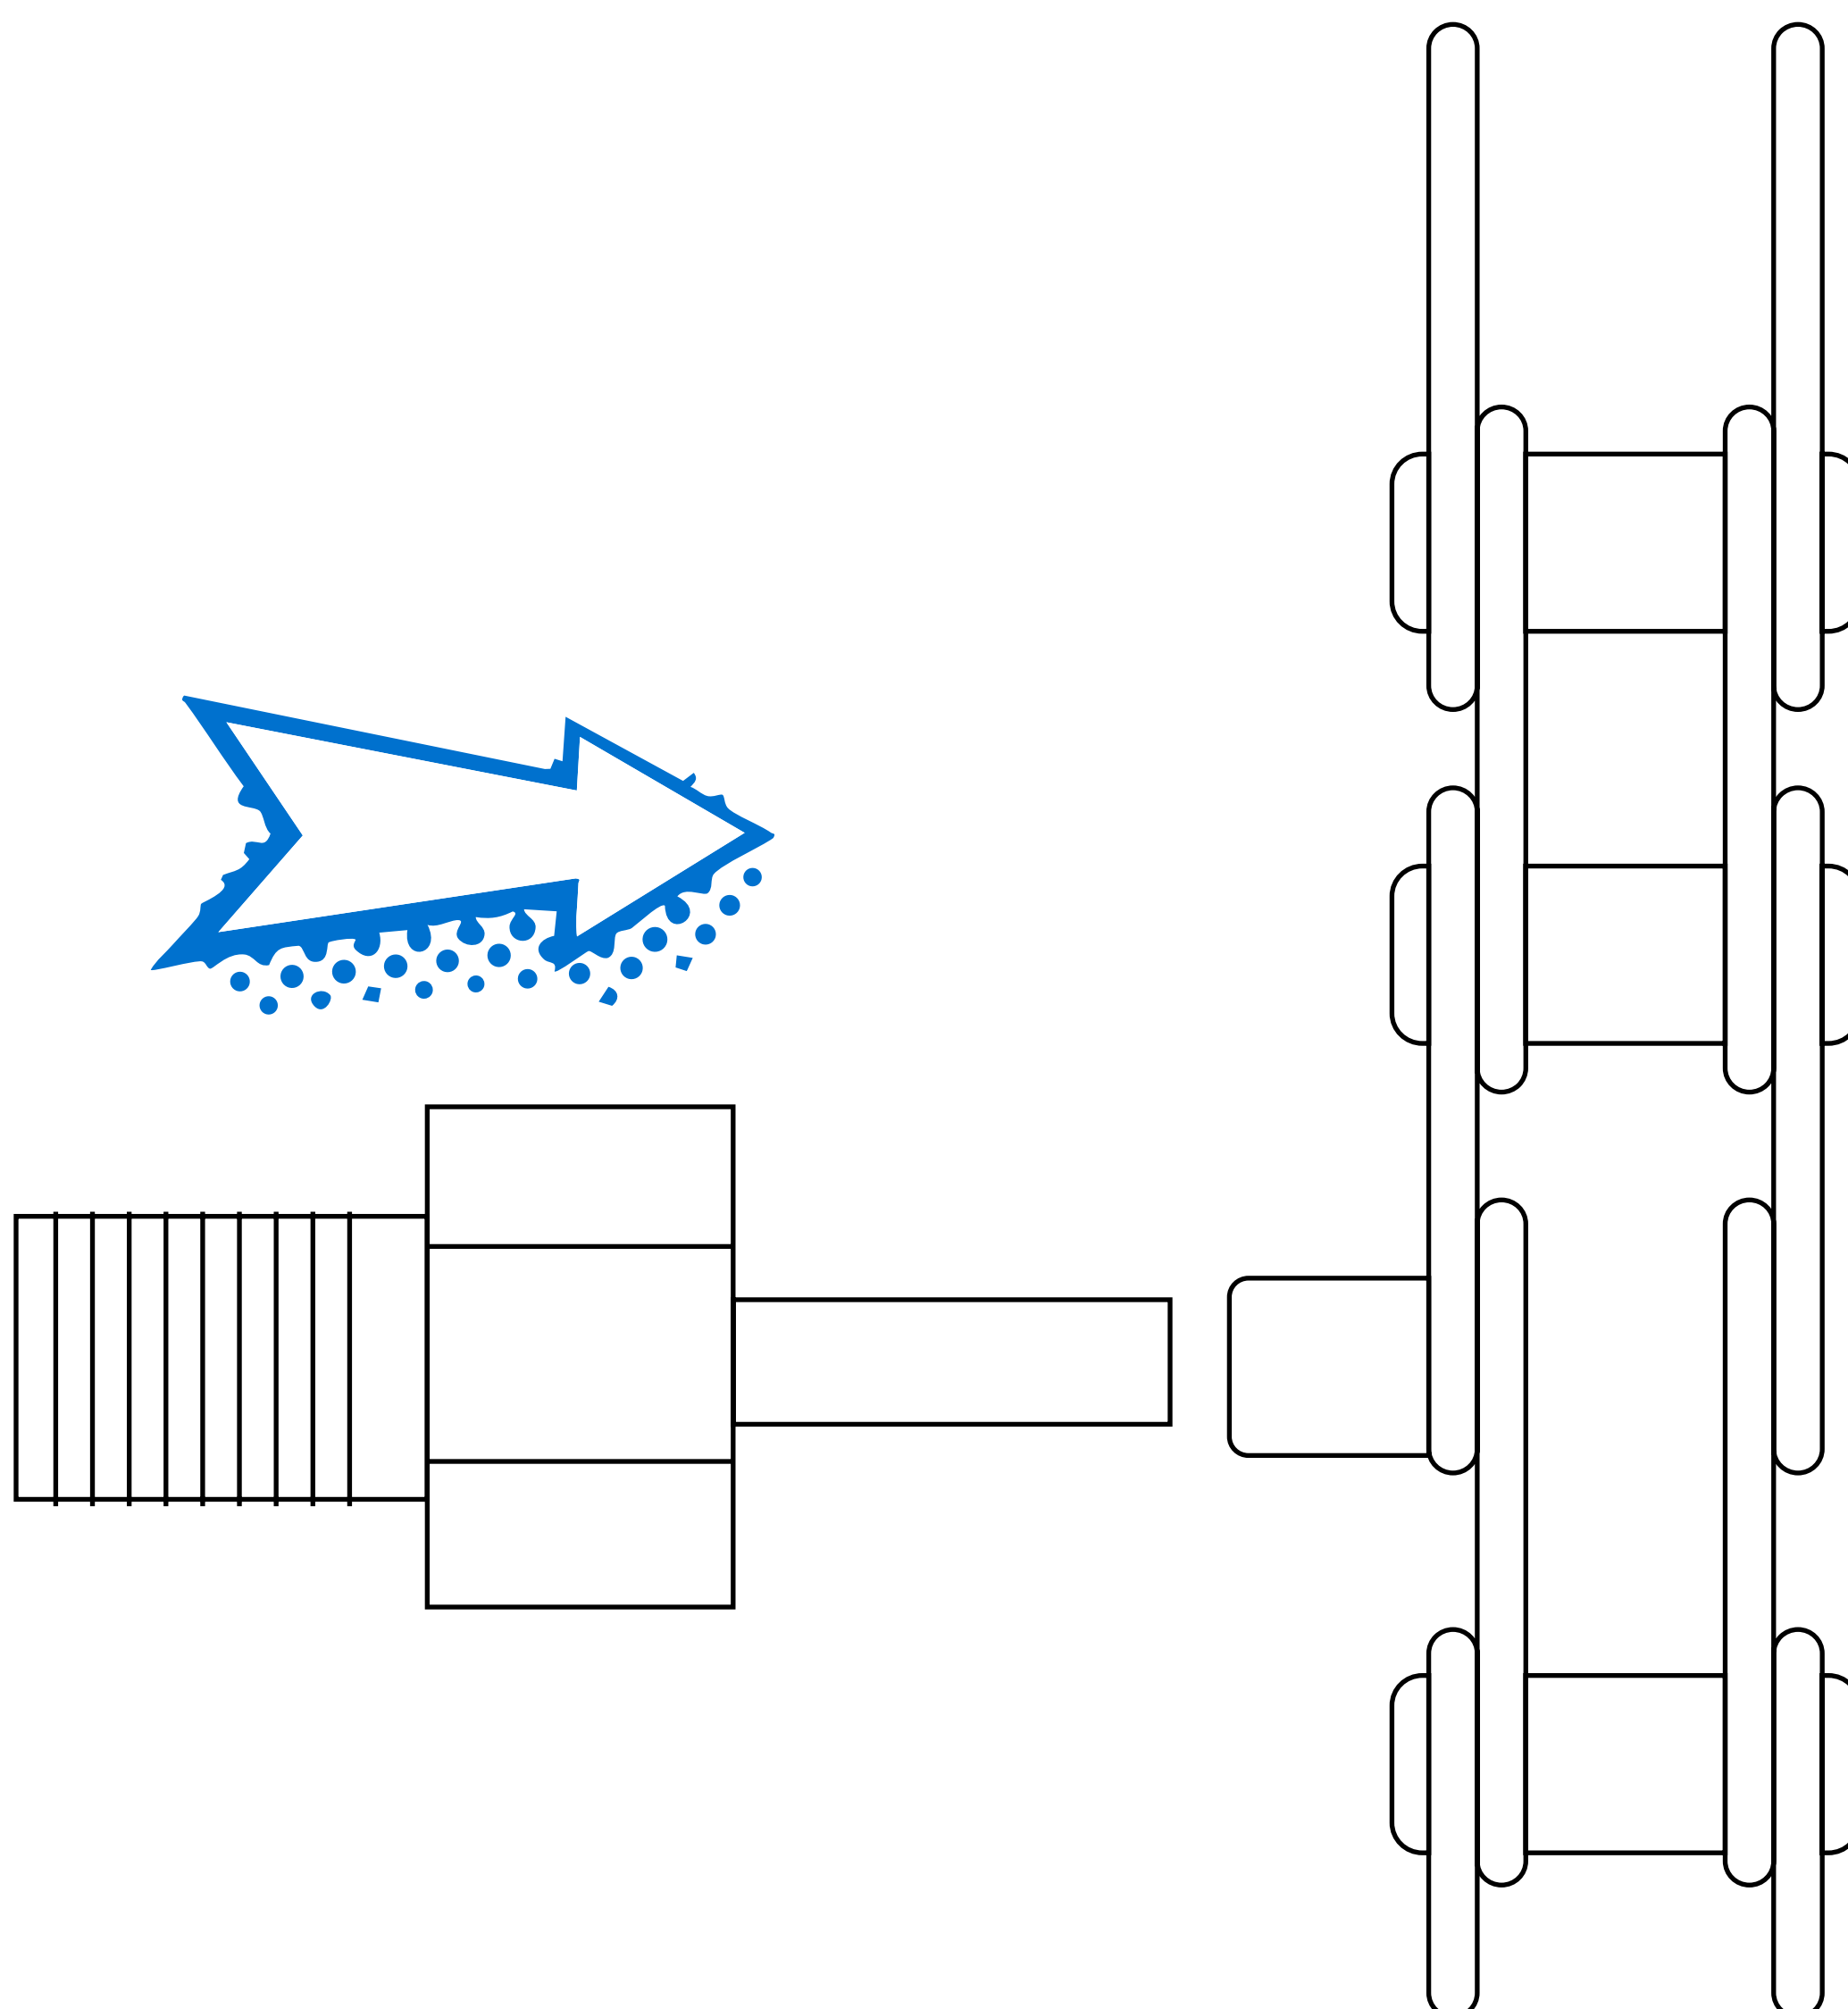


Bicycle chain from above




Select the appropriate chain lock for your bicycle chain. The size is indicated on the side of each chain lock.

The triangle indicates the version for 6-8-speed chains.

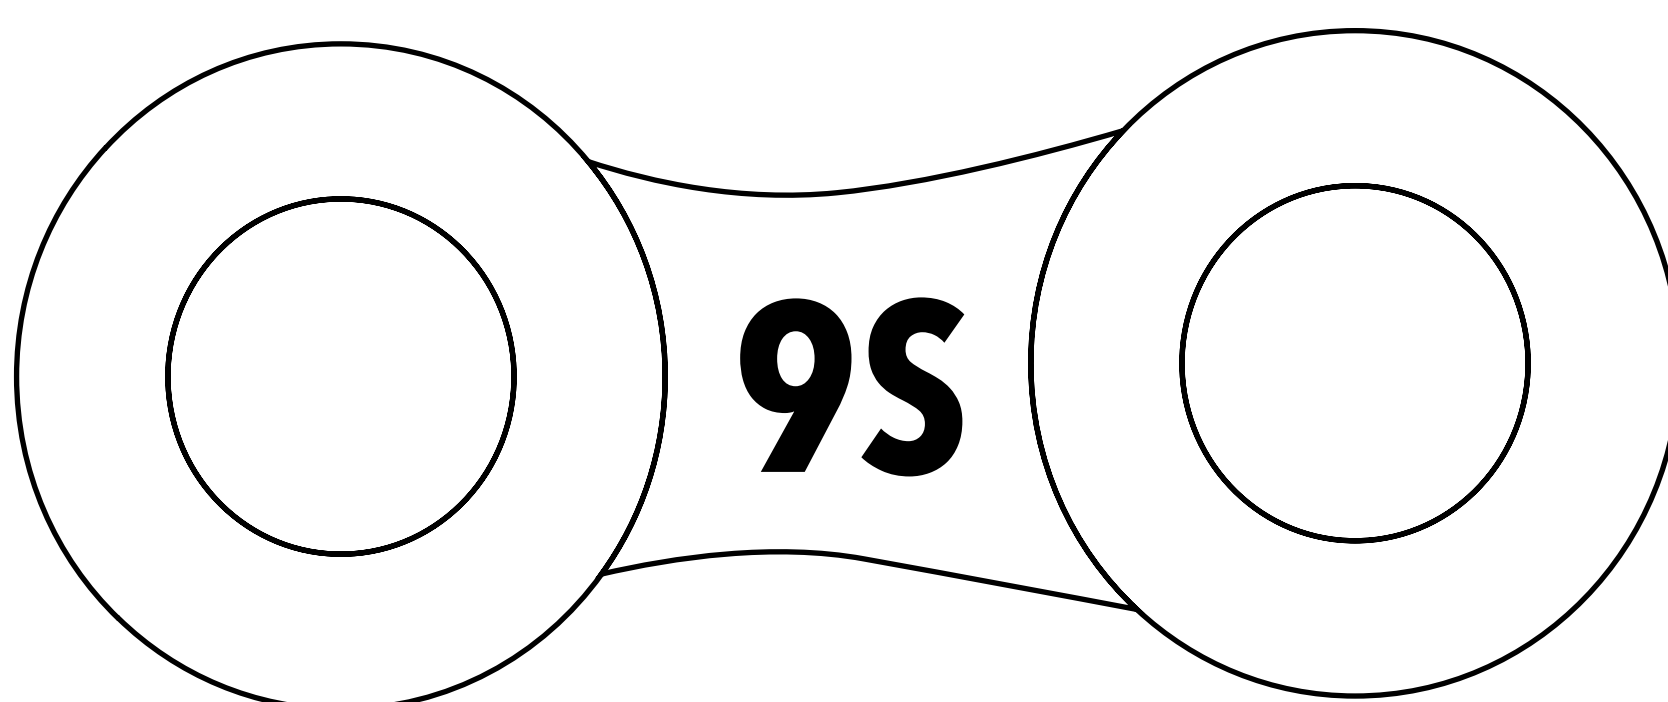


Example: 9S size specification

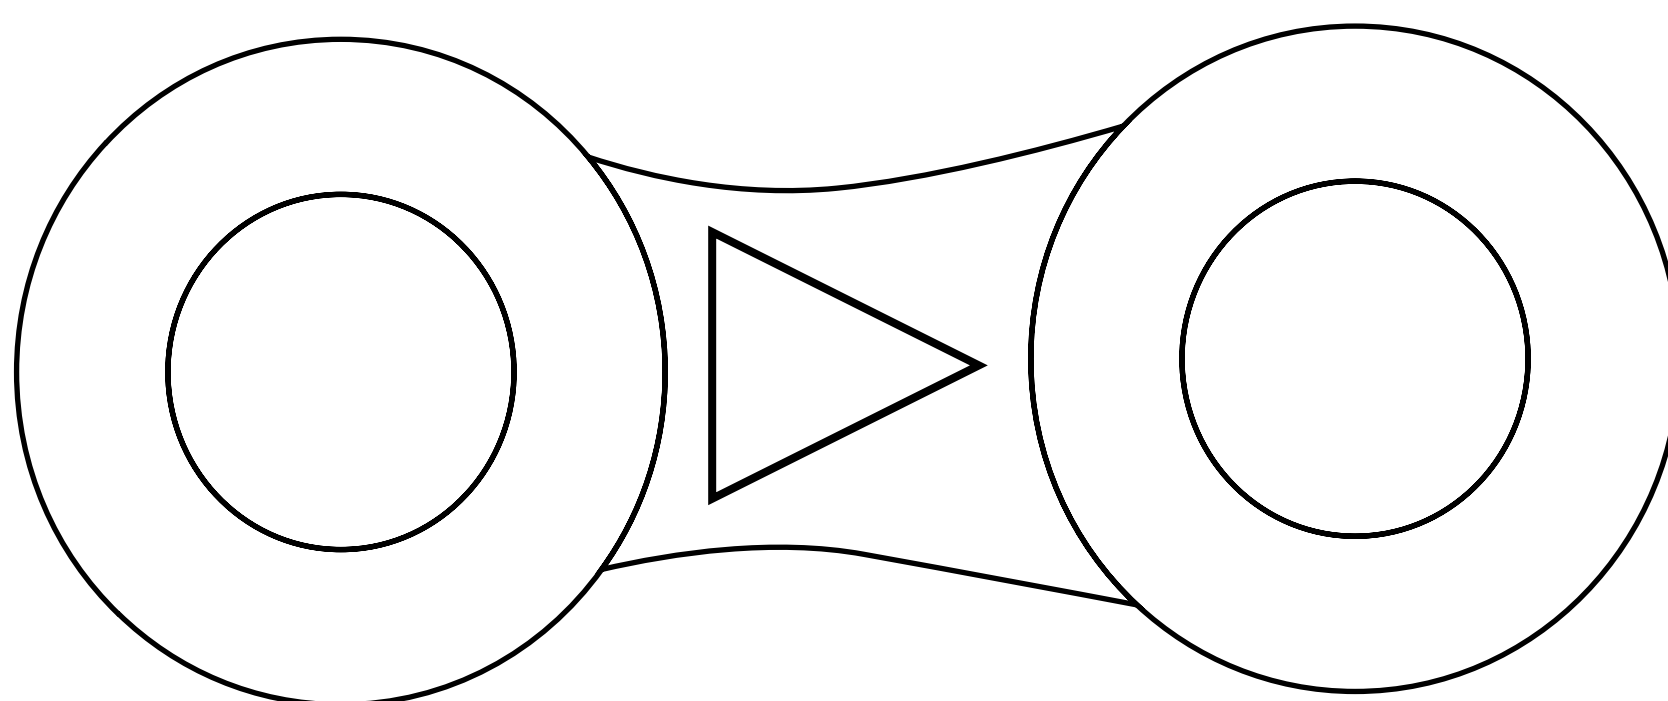


Example: 6-8S size specification



The included chain locks can be installed and removed using the chain lock pliers. Feed both halves of the chain lock through the ends of the chain from the outside and snap them together.

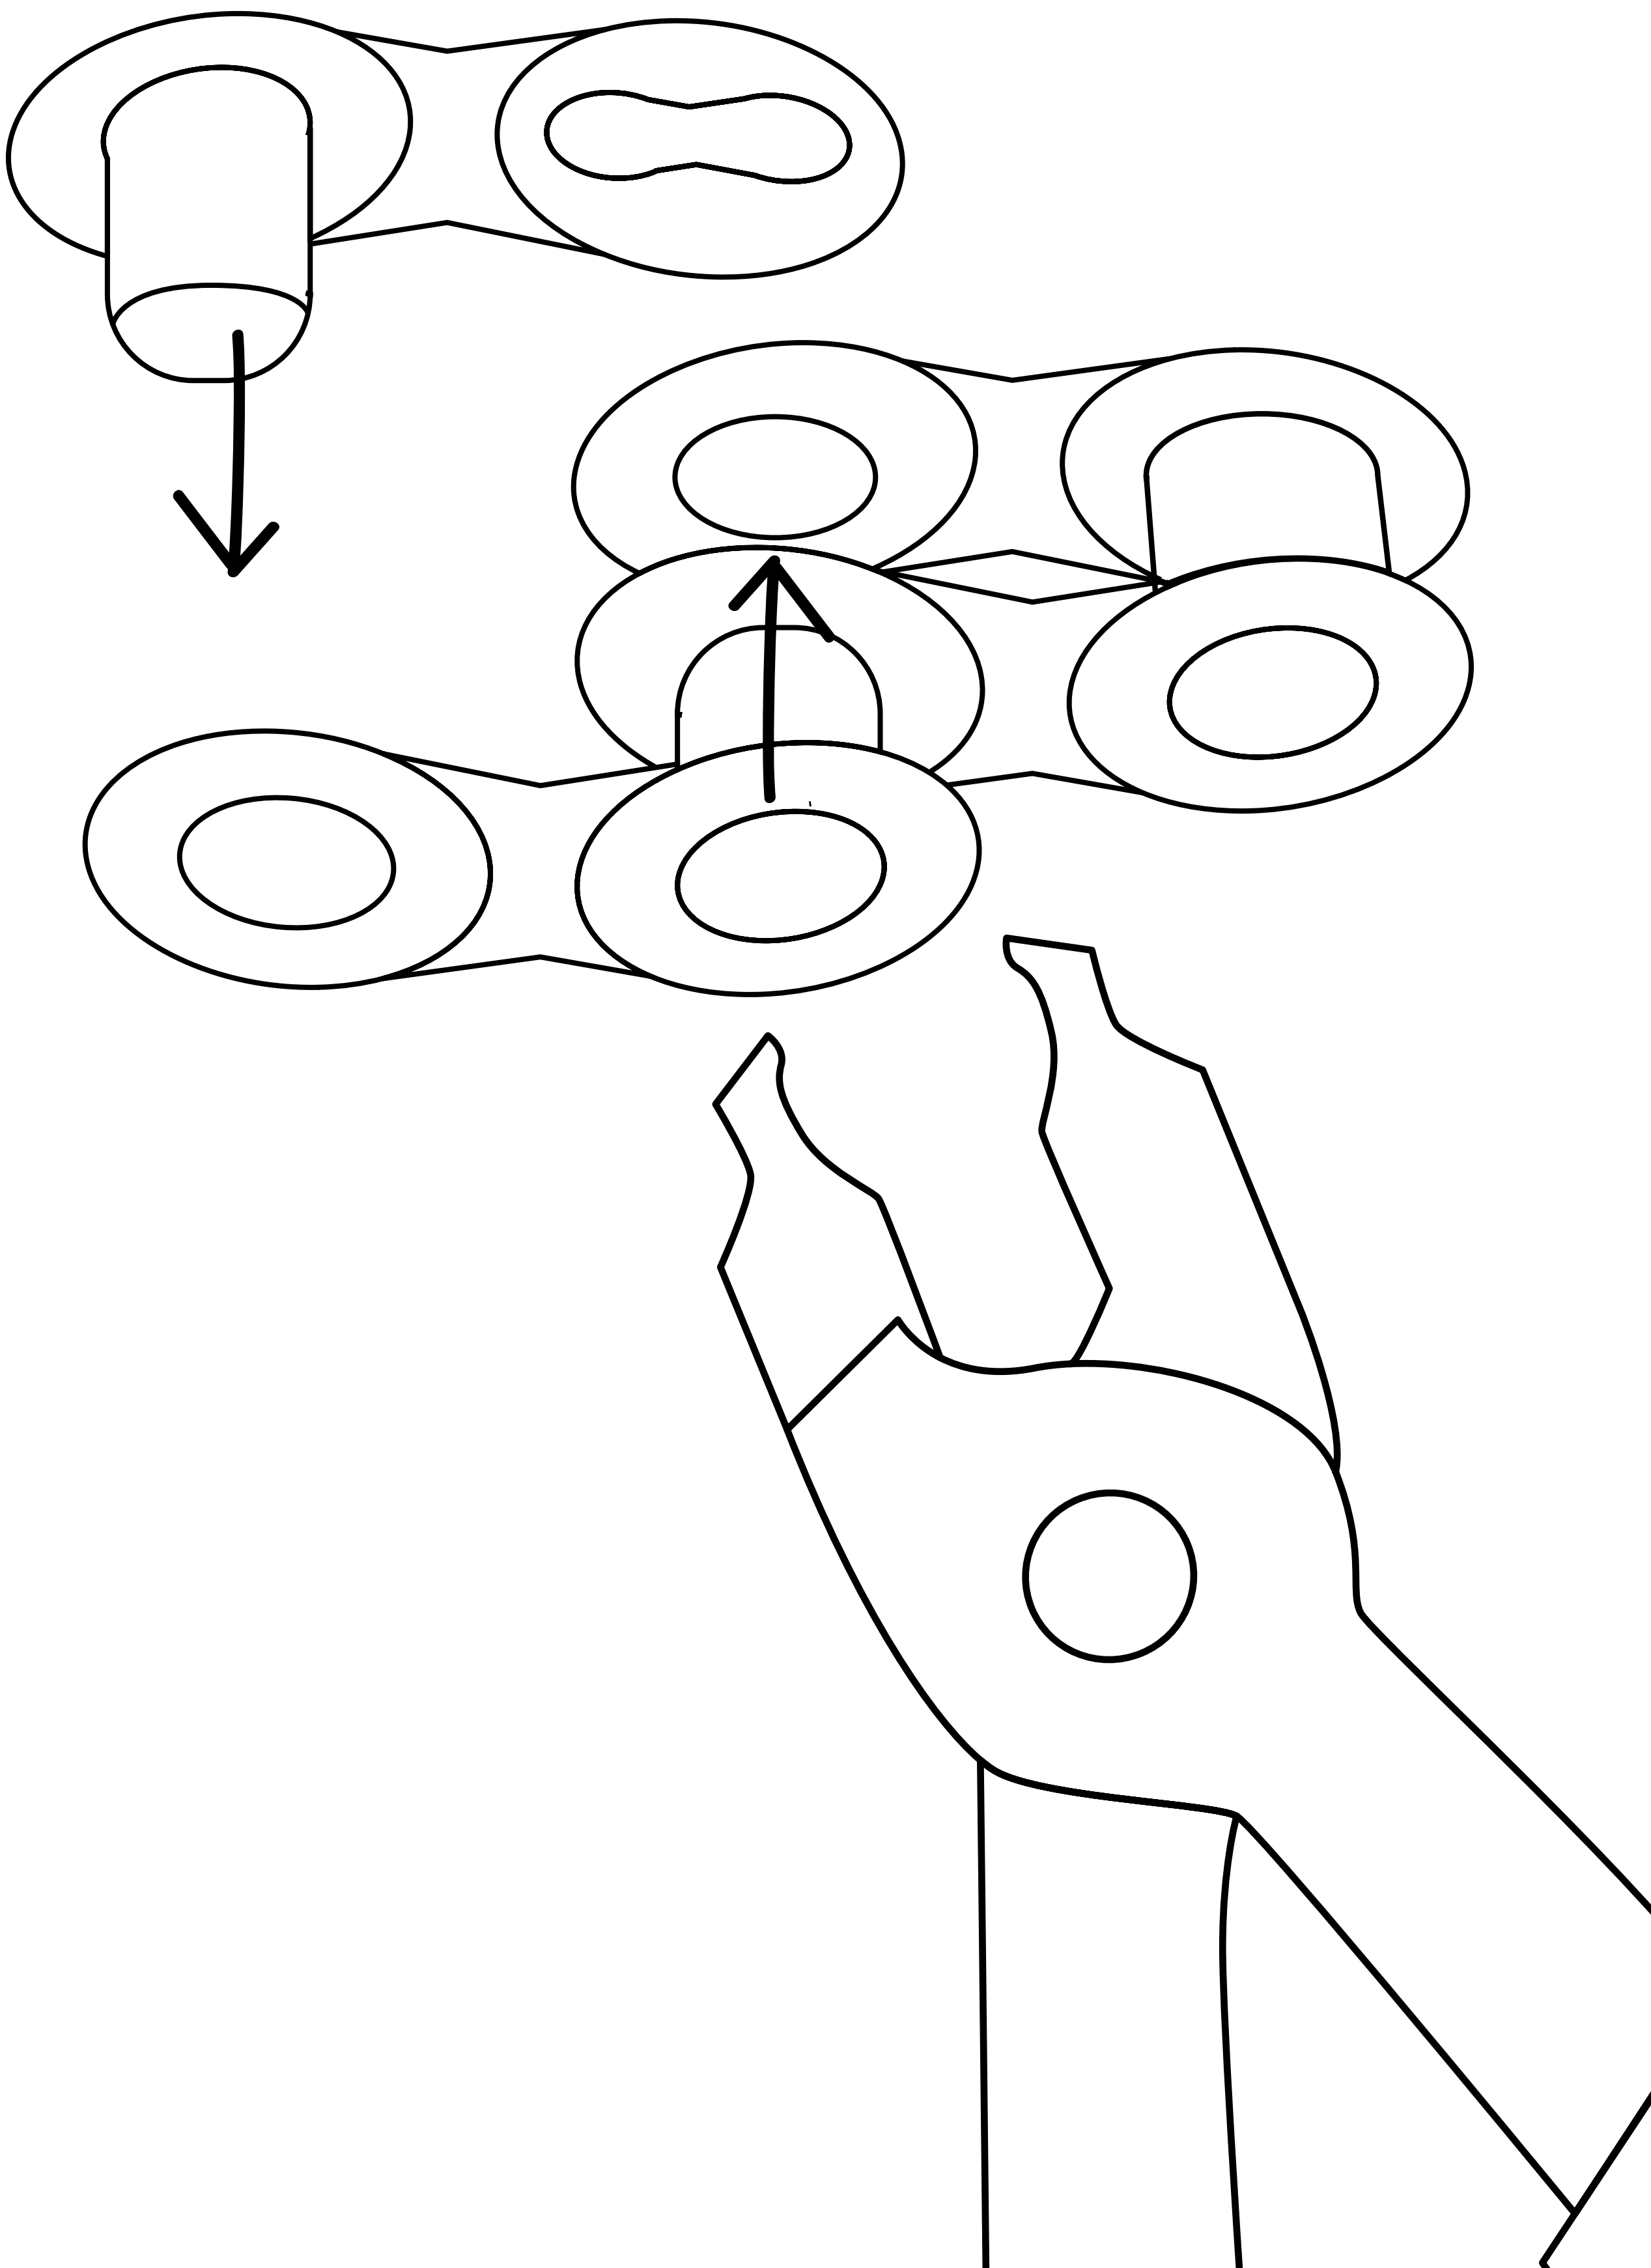

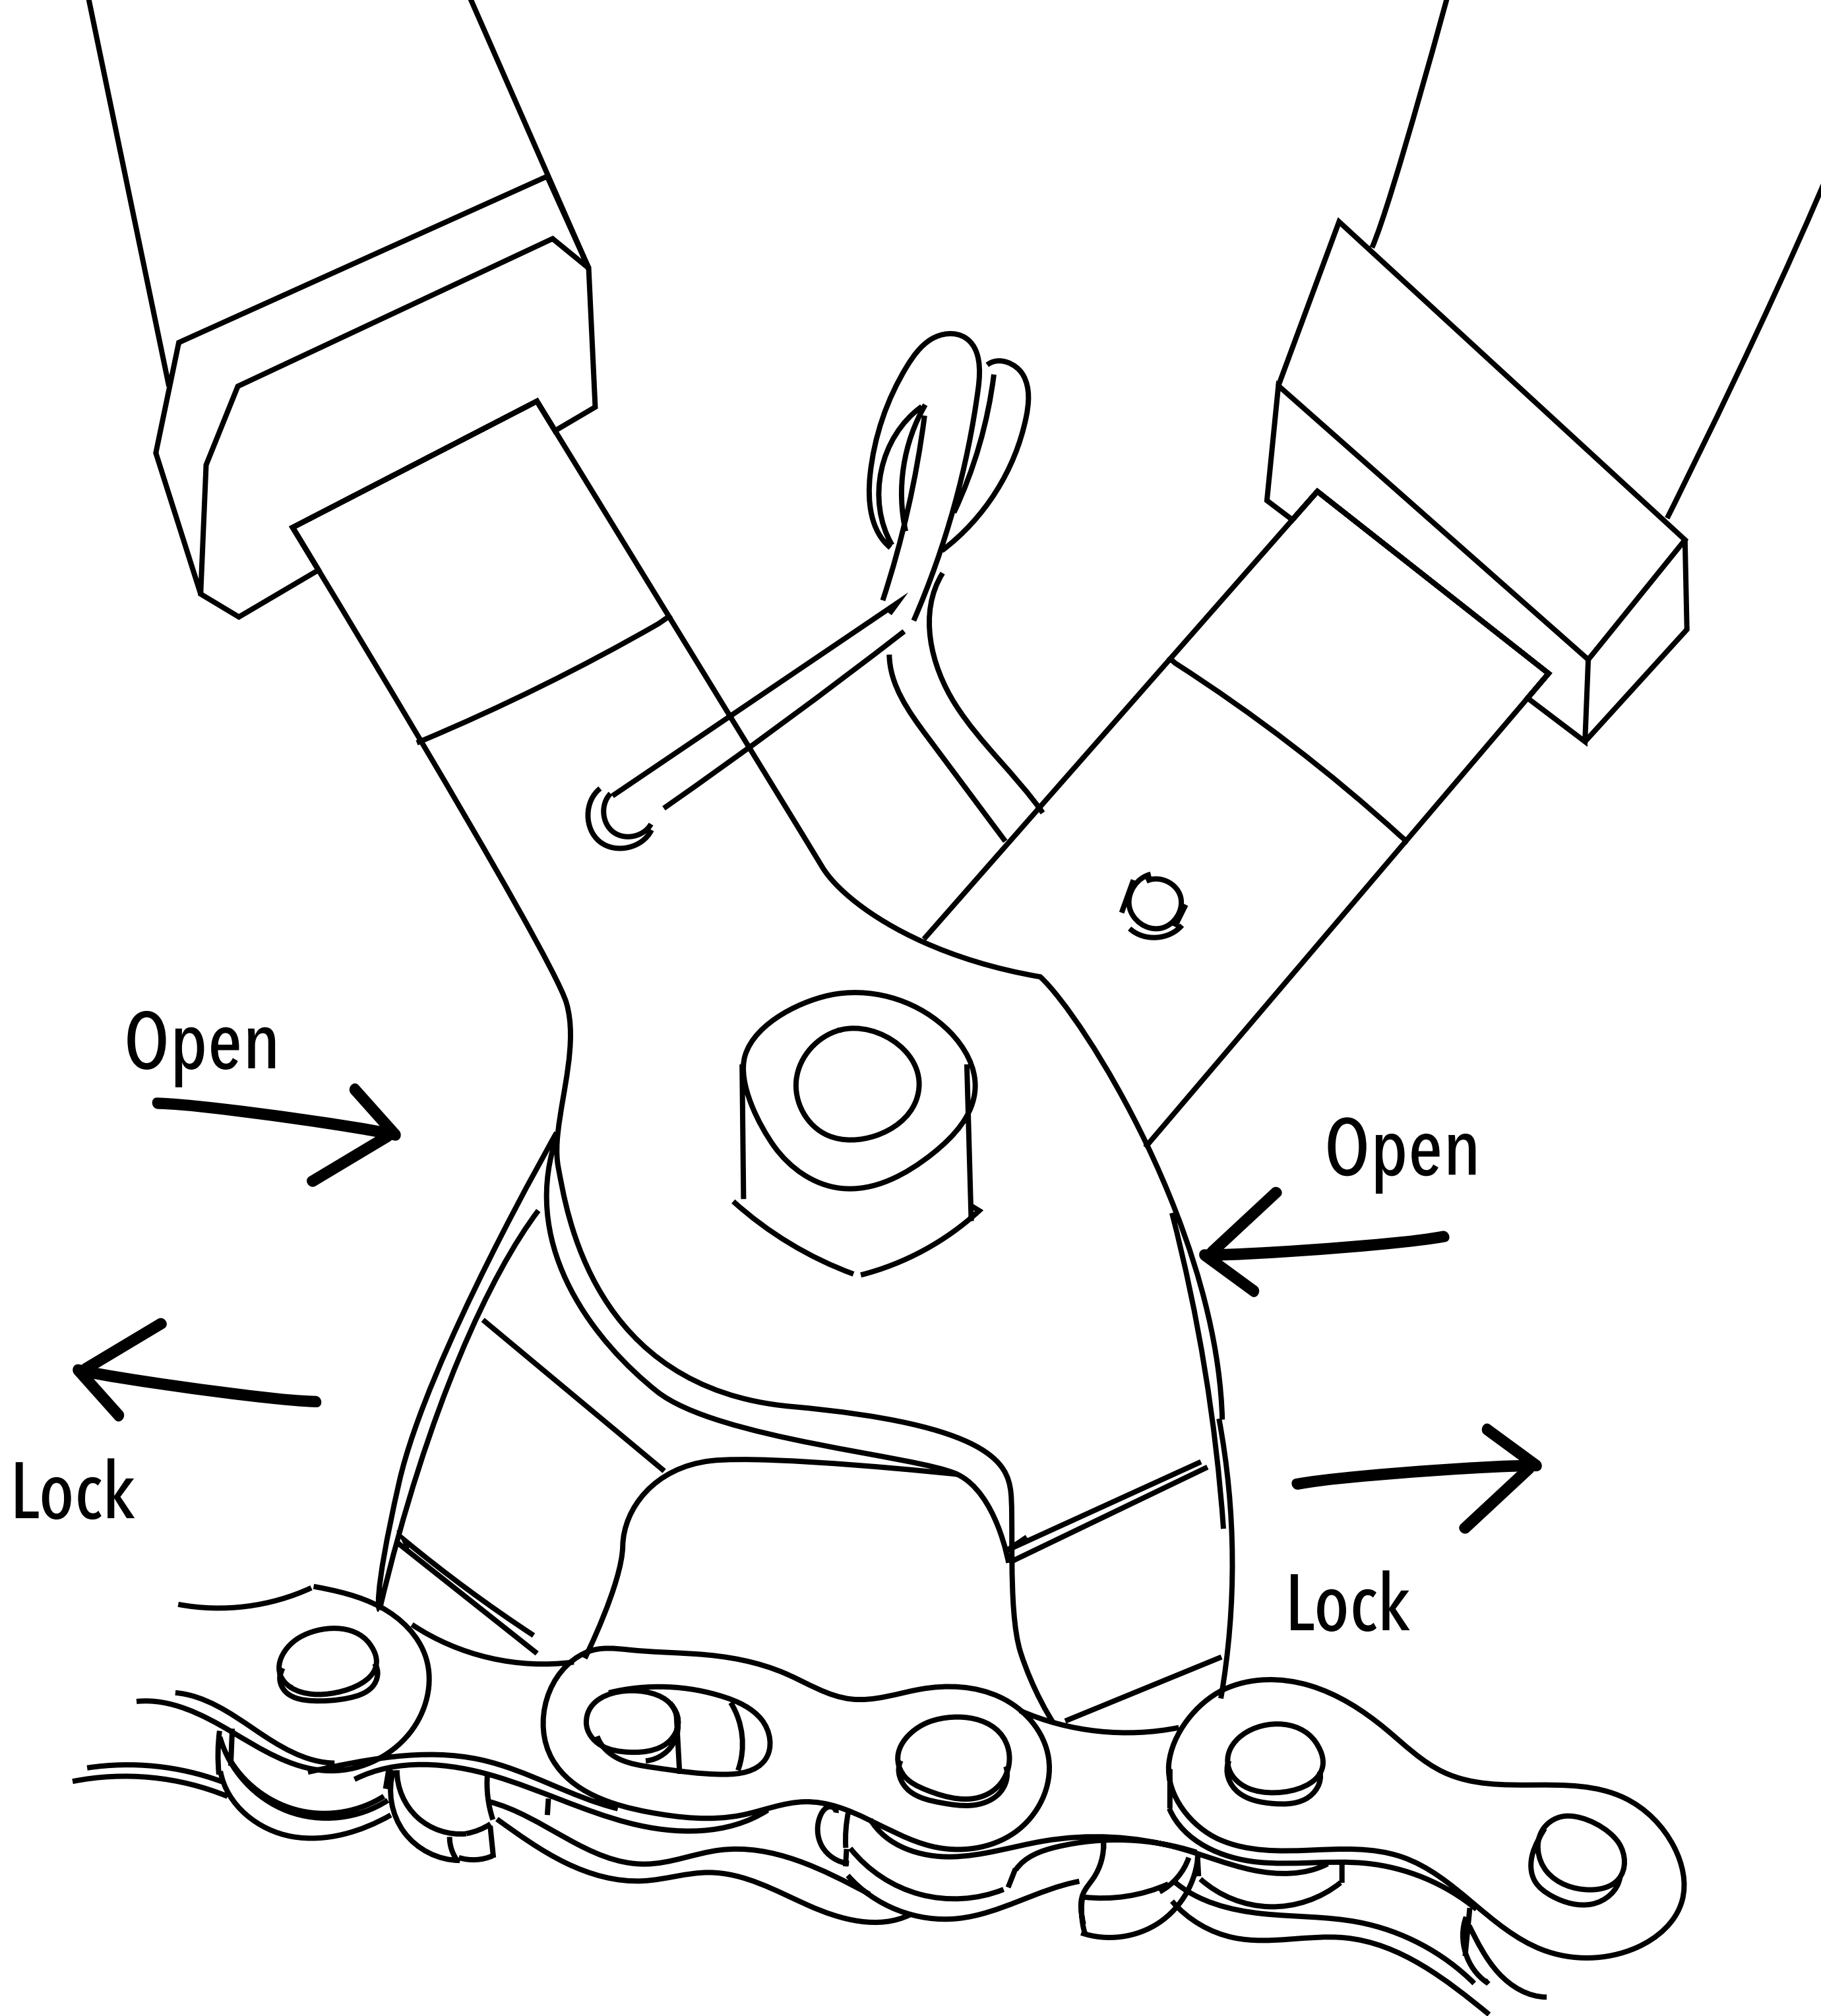

Lock the chain lock using the chain lock pliers by squeezing the handles together. To open it, apply the pliers in the opposite direction.

YOUR CUSTOMER SERVICE

CONTACT



SR-1315



STONE REEF GmbH
stone-reef.com/service